

15-039-20019-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Decatur County, Sect 9 Twp. 2 Rge. 28 (E) W (W)

Location as "NE/CNWKSW" or footage from lines SW-NE-SE

Lease Owner John O. Farmer, Inc.

Lease Name Brown Well No. 1

Office Address P. O. Box 350 Russell, Kansas 67665

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed _____ 19____

Application for plugging filed _____ 19____

Application for plugging approved _____ 19____


Plugging commenced _____ Nov. 9, 1967

Plugging completed _____ Nov. 11, 1967

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

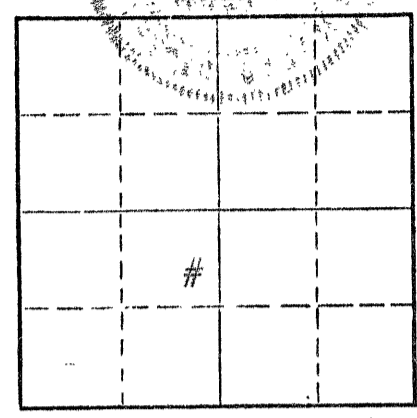

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Bill Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	178'	None
				4 1/2	3813'	1919'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand from 3672' to 3650'. Mixed and dumped 3 sx. of cement from 3650' to 3614'. Pulled casing. Mixed and pumped in 13 sx. of gel plus 5 sx. of hulls. Mixed and pumped in 100 sx. of posmix from 1480' to 1160'. Mixed and pumped in 20 sx. of gel from 1160' to 210'. Mixed and pumped in 25 sx. of posmix from 210' to 135'. Mixed and pumped in 2 sx. of gel from 135' to 30'. Mixed and pumped in 5 sx. of posmix from 30' to base of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
REG 2 x 1967

CONSERVATION DIVISION
12-21-67

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Russ Casing Pulling Inc.

Address Box 1082 Great Bend, Ks.

STATE OF KANSAS, COUNTY OF RUSSELL, ss. JOHN O. FARMER, President (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John O. Farmer

P.O. Box 352, Russell, Kansas
(Address)



Subscribed and Sworn to before me this 20th day of December, 1967

Helen Carlson
Notary Public.

My commission expires February 15, 1971