


DISTRICT CONSERVATION AGENT'S REPORT

15-147-30175-00-00

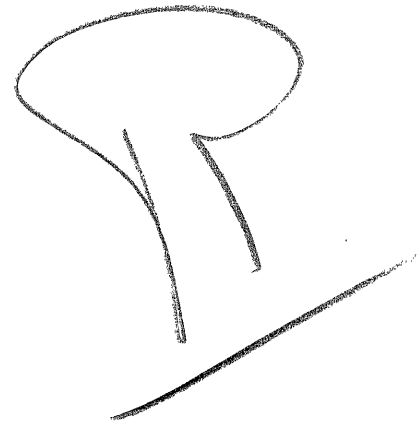

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NW NW SE

SEC. 15 TWP. 2 RGE. 19 W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease ~~Van Kooten~~ Van Kooten

Operator Deep Rock Oil Corp. Address Hoke Bldg, Hutchinson, Kans

Field _____ County Phillips

Total Depth 3772 Feet.

(Describe briefly the manner in which the well was plugged)

10" at 280' circulated with cement - 7" at 3606' with 300 sax
cement behind. Cement and Halliburton plugs to 3450', top perf.,
at 3426'.

Filled with chat to 3420' set 5 sax cement with dump
bailer, pulled 2955' 7" casing, filled hole with mud to
280', set rock bridge and 20 sax cement, filled with heavy
mud to 35' set rock bridge and 15 sax cement to bottom
cellar.

PLUGGING
FILE SEC 15 T 2 R 19 W
BOOK PAGE 25 LINE 30

09-05-1950
SEP 5 X 1950
STATE CORPORATION
District Conservation Agent
KANSAS
Date 9-1-50