


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

15-039-30074-00-00

NORTH

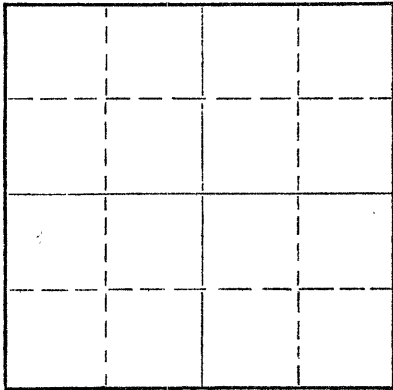

Locate well correctly on above
Section Plat

Decatur County. Sec. 29 Twp. 2 Rge. 29 (E) (W) x
Location as "NE/CNW%SW%" or footage from lines SW SW SW
Lease Owner Hydrocarbon Survey
Lease Name Shaw "A" Well No. #1
Office Address 612 Union Center Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 11-5-68 19
Plugging commenced 11-12-68 19
Plugging completed 11-20-68 19
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 4009' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	4009'	1471.62'
				7"	280'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3950'. Mixed and dumped 3 sacks cement through dump bailer.
Squeezed hole with 3 sacks hulls and 8 sacks gel.
70 sacks cement from 1710' - 1385'
14 sacks gel from 1385' - 325'
20 sacks cement from 325' - 235'
3 sacks gel from 235' - 30'
7 sacks cement from 30' - 0'

RECEIVED
STATE CORPORATION COMMISSION
NOV 25 1968
CONSERVATION DIVISION
Wichita, Kansas

11-25-68

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Sidney D. Miller
Box 364, Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 22 day of November, 1968

My commission expires Feb. 28, 1972
Wanda C. Spencer
Notary Public.

