

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-081-20996-00-01  
Spot: SWNW Sec/Twnshp/Rge: 35-30S-33W  
3300 feet from S Section Line, 4620 feet from E Section Line  
Lease Name: SIMPSON Well #: 2-35  
County: HASKELL Total Vertical Depth: 5746 feet

Operator License No.: 8061  
Op Name: OIL PRODUCERS, INC. OF KANSAS  
Address: PO BOX 8647  
WICHITA, KS 67208

CIBP Size: feet: 5479  
PROD Size: 4.5 feet: 5574 WITH 150 SX CMT  
SURF Size: 8.625 feet: 1638 430 SX CMT

186<sup>75</sup>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/13/2004 9:15 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: JOE MAAS Company: QUALITY WELL SERVICE, INC. Phone: (620) 278-2026

Proposed Plugging Method: SAND TO 5330' & 4 SX CMT. PLUG AT 1650' WITH 15 SX GEL & 50 SX CMT. PLUG AT 600' WITH 40 SX CMT. PLUG AT 40' IWHT 15 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON  
Date/Time Plugging Completed: 07/13/2004 10:45 AM

WitnessType: COMPLETE (100%)  
KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

PBTD 5479'. SAND TO 5330' WITH 4 SX CMT ON TOP. 1ST PLUG PULL CASING TO 1650'. LOAD HOLE & SPOT 15 SX GEL & 50 SX CMT. 2ND PLUG PULL TO 600' & SPOT 40 SX CMT. 3RD PLUG PULL TO 40' & CIRCULATE 15 SX CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5533	5544		
5524	5530		
5380	5386		

RECEIVED  
JUL 16 2004  
KCC WICHITA


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 1805' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

RECEIVED  
JUL 14 2004  
KCC Dodge City

Signed

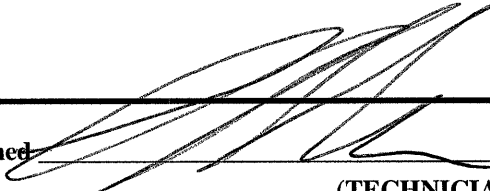

(TECHNICIAN)

INVOICED  
DATE 7-16-04  
INV. NO. 2005060066

Form C-2/3