

15-147-00664-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

WELL PLUGGING APPLICATION FORM

Well Location SE 1/4 NW 1/4 Sec. 27 Twp. 3 Rge. 17W (E) (W)

Field Name (if any) Wildcat County Phillips

Lease (Farm Name) Rowland Heirs Well No. 1

Was well log filed with application? Yes If not, explain circumstances and give available data (Use an additional sheet if necessary)

Date and hour plugging is desired to begin 4-5-43

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary)

Name of the person on the lease in charge of well for owner

C. C. Cornwell Address Box 84, Hays, Kansas

Name of well owner or Acting Agent

Address

Invoice covering assessment for plugging this well should be sent to:



E. A. Rose Address Box 786, Great Bend, Kansas

and payment will be guaranteed by applicant.

Northern Ordnance Incorporated

By T. L. Pratt  
Operator or Acting Agent

Date April 30, 1943

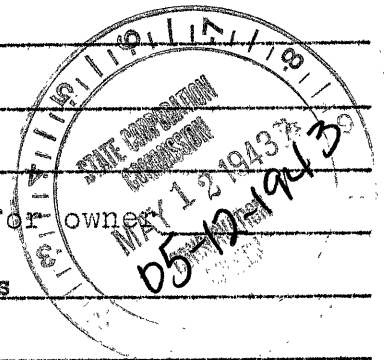

15-147-00664-00-00

WELL LOG

Roland Heirs #1

OPERATOR: NORTHERN ORDINANCE INCORPORATED  
CONTRACTOR: HOLM DRILLING COMPANY

LOCATION: SE <sup>NW</sup> ~~NE~~ Sec 27-3s-17w, Phillips County, Kansas

Commenced: March 14, 1943

Completed: April 5, 1943

Total Depth: 3742'

Casing record: 10" set at 242' and cemented with 175 sacks of bulk cement by  
HALLIBURTON CEMENTING COMPANY

<u>FORMATIONS</u>	<u>DEPTH</u>
Surface clay	30
Shale	249
Shale and shells	780
Shale	824
Shale and shells	975
Iron and Sand	1115
Shale and shells, light	1200
Shale, red	1220
Red bed	1310
Shale and shells	1369
Anhydrite	1380
Lime, light, hard	1420
Shale, red	1470
Shale and red bed	1630
Shale and shells	1770
Broken lime	1880
Shale and shells	1905
Shale and lime	2180
Lime and shale brakes	2260
Broken lime	2350
Shale and lime broken	2565
Shale and lime	2640
Shale and shells	2720
Shale and lime	2920
Shale and lime broken	2990
Lime, broken	3028
Lime, light, hard	3069
Lime	3185
Lime, broken	3222
Lime	3261
Lime, light, medium	3320
Lime	3402
Shale and lime	3452
Lime, broken	3549
Lime, sandy	3567
Chert	3575
Cherty lime	3635
Lime	3672
Lime, broken	3704
Cherty lime	3724
Lime (lost circ. at 3736)	3742

Run Schlumberger at 3742'

HOLM DRILLING COMPANY

By

*J. C. Hatfield*  
J. C. Hatfield

27 3 17W  
69 32



STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

April 7, 1948

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

Well No. 1  
Farm Rowland  
Description CBS NW 27-3-17W  
County Phillips  
File 69-32

15-147-00664-00-00

Northern Ordnance Corporation  
Great Bend, Kansas

Dear Sirs:

This letter is your permit to plug  
the above subject well, in accordance  
with the Rules and Regulations of the  
STATE CORPORATION COMMISSION.

Yours very truly,

STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR  
CONSERVATION DIVISION

HA

BY: J. P. Roberts  
J. P. ROBERTS

NOTICE: C. T. Alexander  
Box 448  
Great Bend, Kansas