

15-147-00892-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

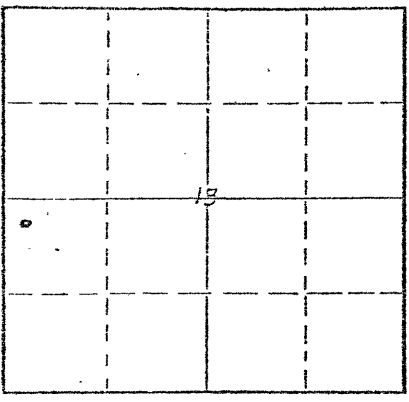

Locate well correctly on above
Section Plat

Phillips County. Sec. 13 Twp. 3S Rge. (E) 19 (W)
Location as "NE/CNW/SW" or footage from lines NW NW SW
Lease Owner Petroleum Management, Inc.
Lease Name Miller "A" Well No. 2
Office Address 400 North Woodlawn, Suite 201, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 19
Application for plugging filed 8- 5 1974
Application for plugging approved 19
Plugging commenced 8- 8 1974
Plugging completed 8-20 1974
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3562 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1504	
				5 1/2	3368	2272'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug back to 3000' with sand. Ran 4 sacks cement with bailer to 2970'.
Mud @ 775'. Bridge @ 760'. Redi-mix to 400'. 15 bbl water to 170'. Bridge to 160'. Redi-mix from 160' to top of surface pipe.


RECEIVED
STATE CORPORATION COMMISSION
NOV 13 1974
CONSERVATION DIVISION
Wichita, Kansas

11-13-74

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Petroleum Management, Inc. # 731
Address 400 N. Woodlawn, Suite 201, Wichita, Kansas 67208

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
DALE SILCOTT (employee of owner) of (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Silcott



SUBSCRIBED AND SWORN to before me this 20th day of September, 1974.
MARIE C. MURPHY, Notary Public
My commission expires April 23, 1978

(Address) Marie C. Murphy, Notary Public.

15-147-00892-00-00

PETROLEUM
MANAGEMENT
INC.

400 N. WOODLAWN, SUITE 201



RECEIVED
STATE CORPORATION COMMISSION
WICHITA, KANSAS 67208 (316) 686-7287
NOV 13 1974
CONSERVATION DIVISION
Wichita, Kansas

11-13-74

November 12, 1974

Mr. J. Lewis Brock
State Corporation Commission
Conservation Division
3830 S. Meridian
Wichita, KS 67217

Re: Well No. 2
Lease - Miller "A"
NW NW SW 13-3-19W
Phillips County, Kansas

Dear Mr. Brock:

Enclosed herewith is a copy of the well plugging record for the captioned lease as requested in your letter of November 5. The original was mailed to you on or around September 20 and was apparently lost in the mail. If you require another original, please notify us.

We purchased this lease from Phillips Petroleum on January 1, 1969 and the records we received did not include a driller's log, therefore, we are unable to supply that information.

If you have any questions, please notify us. Thank you.

Yours very truly,

PETROLEUM MANAGEMENT, INC.

Mrs. Gerri Keating

Gerri Keating
Secretary

/gk
Enc.