

15-147-01001-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

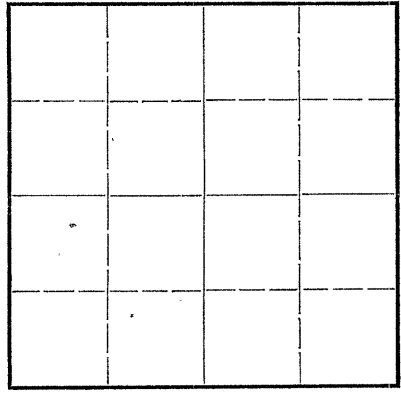

Locate well correctly on above
Section Plat

Phillips County. Sec. 35 Twp. 3 Rge. (E) 19 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 330' fr. N, 330' fr. E
Lease Owner Phillips Petroleum Company.
Lease Name Grau Well No. 1
Office Address Box 528 - Russell
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 10, 19 47
Application for plugging filed December 11, 19 47
Application for plugging approved December 15, 19 47
Plugging commenced December 11, 19 47
Plugging completed December 11, 19 47
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. C. D. Stough
Producing formation Arbuckle Depth to top 3562 Bottom Total Depth of Well 3615 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Anhydrite	Dry	1540'	1600	8 5/8"	1600	None
Lansing Kansas City	Dry	3200				
Arbuckle	Dry	3562	3615	None	None	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from 3615' to 1500'. Set wood plug and ran 15 sacks cement. * Filled hole with heavy mud to 30', set wood plug and ran 10 sacks cement in filling to base of cellar.

* Filled with mud to 200', set wood plug and ran 15 sacks cement at 200'.

12-24-47

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. R. A. McKnight
Address Box 528 - Russell, Kansas.

STATE OF Kansas, COUNTY OF Russell, ss.
Ralph McKnight (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Ralph McKnight*
Box 528 - Russell, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this 22 nd day of December, 1947
My commission expires May 8, 1948.
Bernie Smith
Notary Public.

21-543-s 8-45-6M

PLUGGING
FILE SEC 35 T 3 R 19 W
BOOK PAGE 4 LINE 2

15-147-21001-00-00

Form No. 873

Formation Record

Lease

Grav

Well No. 1

FROM	TO	Formation	REMARKS
0	918	Shale and Shells	ELEVATION: 2071'
918	1029	Lime, Shale and Pyrite	
1029	1254	Pyrite and Shale	
1254	1491	Shale and Shells	
1491	1540	Shale	
1540	1600	Anhydrite	Top Anhydrite - 1540'
1600	1615	Shale	
1615	2279	Sand, Shale and Shells	
2279	2793	Sand and Shells	
2793	3311	Lime and Shale	Top IKC - 3200'
3311	3354	Lime	
3354	3615	Lime and Shale	Top Arbuckle - 3562'

PLUGGING
 FILE SEC 35-3-R 190
 4 30

12-24-47