

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-21830-00-00
Spot: NENWSWSW Sec/Twnshp/Rge: 10-23S-33W
1167 feet from S Section Line, 510 feet from W Section Line
Lease Name: ROME TRUST Well #: 1-1310
County: FINNEY Total Vertical Depth: 4975 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 1775 SHERMAN STE 2950
DENVER, CO 80203

SURF Size: 8.625 feet: 1717

\$16d 69

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 07/10/2004 8:00 AM
Plug Co. License No.: 5382 Plug Co. Name: CHEYENNE DRILLING, INC.
Proposal Rcvd. from: RODNEY GONZALEZ Company: CHEYENNE DRILLING, INC. Phone: (620) 277-2062

Proposed Plugging Method: 1ST PLUG AT 3100' WITH 100 SX CMT. 2ND PLUG AT 1710' WITH 50 SX CMT. 3RD PLUG AT 1000' WITH 30 SX CMT. 4TH PLUG AT 40-0' WITH 10 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE
Date/Time Plugging Completed: 07/10/2004 5:00 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

Perfs:


1ST PLUG AT 3100' WITH 100 SX CMT. 2ND PLUG AT 1710' WITH 50 SX CMT. 3RD PLUG AT 1000' WITH 30 SX CMT. 4TH PLUG AT 40-0' WITH 10 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

RECEIVED
AUG 04 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: DP

District: 01

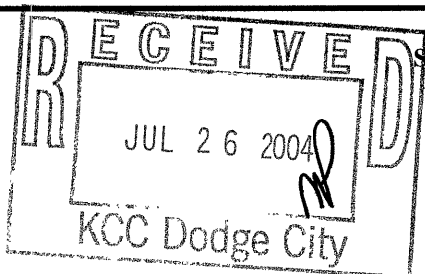

Signed

Steve Durrant

(TECHNICIAN)

INVOICED

DATE

8-5-04

INV. NO.

2005060299