

15-137-00217-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Norton County, Sec. 15 Twp. 3 Rge. 23 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SE NW
Lease Owner Burch Drilling Company, Inc.
Lease Name Horisky Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 8-6-60 19
Plugging completed 8-8-60 19
Reason for abandonment of well or producing formation Depleted

NORTH

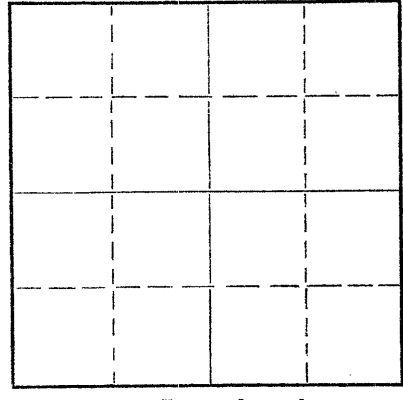

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius
Producing formation Depth to top Bottom Total Depth of Well 3696 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	219'	None
				5-1/2"	3691'	2020'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3690' and found it clear.
Dumped 5 sacks of cement with dump bailer.
Pulled 5 1/2" casing. Checked fluid to 210',
set 10' rock bridge to 200' and ran 2 sacks
of cement and let set. Ran 23 sacks of
cement, mudded hole to 40', set 10' rock
bridge to 30' and ran 10 sacks of cement
to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING COMPLETED.

AUG 19 1960

CONSERVATION DIVISION
Wichita, Kansas

8-19-60

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Company
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 11th day of August, 1960

Milton J. Volin
Notary Public.

My commission expires May 20, 1964



f

15-137-00217-00-00

WELL LOG

Burch Drilling Co., Inc.
I Horesky
SE SE NW, Section 15-33-23W
Norton County, Kansas

Set 219' 3 5/8" with 165 sacks cement.
Commenced: November 11, 1959
Completed: November 19, 1959
ELEVATION: 2386 KB
Set 5 1/2" casing @ 3629' w/75 sacks.

TOPS

960 Shale & Shells
1967 Shale
1992 Anhydrite
2390 Shale
3370 Lime & Shale
3695 Lime

Anhydrite 1968 (424)
Heebner 3426 (-1040)
Toronto 3452 (-1066)
Lansing 3466 (-1080)
Base Kansas City 3650 (-1264)
Arbuckle 3688 (-1302)

3695' Rotary Total Depth

DST # 1 3436-3543. Open 1 hour.
Recovered 45' Mud. IBHP 1120#,
IFP & FFP 0#, FBHP 1000#(30 min).

DST # 2 3538-3654. Open 1 hour.
Recovered 1080' slightly oil cut watery
mud. IBHP (30 min) 1150#, IFP 105#,
FFP 600#, FBHP 895#, (30 min).

DST # 3 3680-3690. Open two (2) hrs.
Recovered 15' oil, 60' muddy oil. IBHP
(30 min) 955#, IFP & FFP 0#, FBHP
710#.

DST # 4 3680-3695. Open two (2) hrs.
Recovered 15' oil, 60' muddy oil. IBHP
(30 min) 725#, IFP & FFP 0#, FBHP
(30 min) 510#.

RECEIVED
STATE CONSERVATION COMMISSION
AUG 30 1960
CONSERVATION DIVISION
Wichita, Kansas

2-30-60

STATE OF KANSAS, COUNTY OF SEDGWICK:

I, Earl M. Burch, President of BURCH DRILLING CO., INC. being duly sworn on oath, state: That I have knowledge of the facts, statements, and matters herein contained and that the same are true and correct.

Earl M. Burch
Earl M. Burch, President

Subscribed to and sworn to before me this 25th day of November, 1959.

Suzanne Ann Arns
Notary Public

My commission expires: March 12, 1963.