

15-137-00041-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

WELL PLUGGING APPLICATION FORM

Well Location C NE NE Sec. 7 Twp. 3S Rge. (E) (W) 23

Field Name (if any) None County Norton

Lease (Farm Name) Conway Well No. 1

Was well log filed with application? yes If not, explain circumstances and give available data (Use an additional sheet if necessary)

Plugged on verbal authorization. Log filed with formal application.

Date and hour plugging is desired to begin \_\_\_\_\_

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary) No exceptions.

Name of the person on the lease in charge of well for owner \_\_\_\_\_

C. R. Smith Address Great Bend, Kansas.

Name of well owner or Acting Agent Helmerich & Payne & Phillips.

Address Tulsa

Invoice covering assessment for plugging this well should be sent to:

Helmerich & Payne, Inc. Address 415 Philtower Bldg., Tulsa Oklahoma

and payment will be guaranteed by applicant.

7 - 3 - 234  
BOOK PAGE 20 E-17

L. M. Copeland 01-10-1942  
Operator or Acting Agent  
Date 1-9-42

Conway #1  
E/2 Section 7-38-23W  
Norton County, Kansas  
Phillips Petroleum Company  
 And  
Helmerich & Payne, Inc.

15-137-00041-00-00

Commenced: December 17, 1941  
 Completed: December 31, 1941


Surface soil	0	115
Sand	115	127
Rock cap surface soil	127	325
Blue shale	325	570
Gypsum rock	570	585
Blue Gumbo	585	760
Shale, sand and shells	760	1250
Sand	1250	1340
Shale	1340	1365
Shale and shells	1365	1460
Sand and shale	1460	1950
Anhydrite	1950	1965
Shale and sand	1965	1995
Shale	1995	2155
Lime and shale	2155	2265
Shale	2265	2405
Shale and lime	2405	2460
Chert and lime	2460	2480
Lime, broken	2480	2565
Lime	2565	2595
Shale and lime	2595	2680
Lime, broken	2680	2725
Lime	2725	2845
Lime, broken	2845	2895
Lime	2895	3480
Lime and shale	3480	3500
Lime	3500	3585
Shale and lime	3585	3625
Granite wash	3625	3638
Granite	3638	3640
TOTAL DEPTH	3640	

CASING RECORD

8-5/8" O. D. Surface casing set at 150' and cemented with 90 sacks of cement.

PLUGGING RECORD

Drove wood plug to bottom of surface pipe. Mixed and pumped in ten sacks of cement. Made plug at 15' and filled with six sacks of cement. Welded steel plate on top of surface pipe.

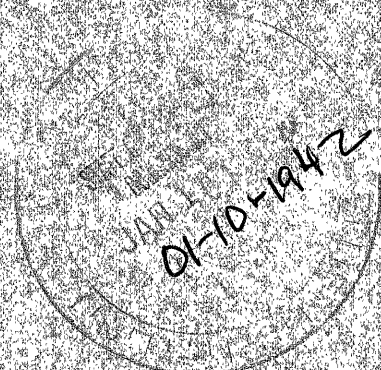

FILE 7 3 23W  
 BOOK PAGE 20 LINE 17

STATE OF OKLAHOMA )  
 ) ss  
 COUNTY OF TULSA )

I hereby affirm that the above and foregoing is a true and correct copy of the log of the Conway Well #1, located in the East Half of Section 7, Township 3 South, Range 23 West, Norton County, Kansas.

HELMERICH & PAYNE, INC.,

*William R. Payne*  
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 9th day of January, 1942.

*W. J. Griffin*  
 Notary Public

My commission expires July 22, 1943.



STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

January 5, 1942

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

15-137-00041-00-00

Well No. 1  
Farm Conway  
Description NWE No 7-3-237  
County Horton  
File 20-17

Helmerich & Payne, Inc.  
415 Philtower Bldg.  
Tulsa, Oklahoma

Dear Sirs:

This letter is your permit to plug  
the above subject well, in accordance  
with the Rules and Regulations of the  
STATE CORPORATION COMMISSION.

Yours very truly,

STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR  
CONSERVATION DIVISION

HA

BY: J. P. Roberts  
J. P. ROBERTS

NOTICE: C. T. Alexander  
Great Bend, Kansas