


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

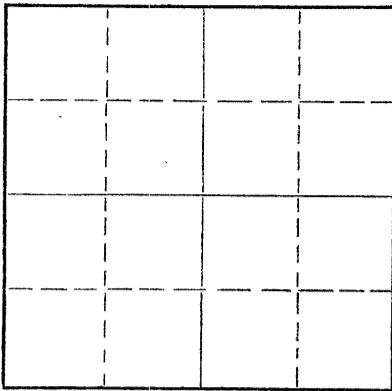

Locate well correctly on above
Section Plat

Decatur County, Sec. 14 Twp. 3S Rge. 27 ~~XX~~ (W)

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Antry & Warren
Lease Name Bailey Estate Well No. 1
Office Address 15 West 4th, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5-13-62 19_____
Application for plugging filed by phone 5-13 1962
Application for plugging approved 5-13 1962
Plugging commenced 5-14 1962
Plugging completed 5-14 1962
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19_____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation none Depth to top _____ Bottom _____ Total Depth of Well 3984 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Drilled as Dry Hole</u>						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from -0 feet to 3984 feet for each plug set.

3984 to 550- filled with 44 Vis. Mud.
550 Set Halliburton Plug and placed 20 sks. cement on plug through drill pipe.
At 180 feet spotted 20 sks. cement through drill pipe and filled to surface with 44 Vis. Mud;
At 35 feet placed Halliburton Plug and filled to top of surface casing and in collar with 8 sks. cement

RECEIVED
STATE CORPORATION COMMISSION

MAY 22 1962

CONSERVATION DIVISION
Wichita, Kansas

5-22-62

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Interstate Drilling Co.
Address 15 West 4th Street, Tulsa, Oklahoma

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
O. F. Warren (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
15 West 4th Street, Tulsa, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 19 day of May, 1962

My commission expires My Commission Expires October 15, 1965

[Signature]
Notary Public.

