


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

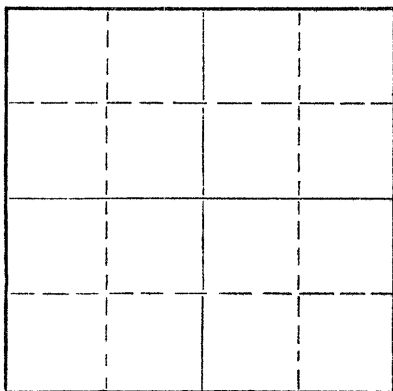

Locate well correctly on above
Section Plat

Dezator _____ County, Sec. 27 Twp. 3 Rge. 27 (E) _____ (W) _____
Location as "NE/CNW/SW" or footage from lines S/2 SW SW
Lease Owner Raymond Oil Company
Lease Name Johnson Well No. 1
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed December 7, 1966 19
Application for plugging filed February 2, 1968 19
Application for plugging approved February 2, 1968 19
Plugging commenced 2/7/68 19
Plugging completed 2/9/68 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production December 13, 1967
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3748 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	268'	none
				5-1/2"	3748'	1251'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked bottom, ran sand to 3625' and dumped 5 sacks of cement.
Loaded hole, shot pipe at 2064', 1957', 1843', 1748', 1346' and 1253'. Worked pipe loose and pulled 39 joints. Halliburton squeezed well. Pumped 30 sacks gel and 130 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
FEB 19 1968
CONSERVATION DIVISION
Wichita, Kansas

2-19-68

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of February, 19 68

My commission expires February 15, 1971
Margaret Melcher Notary Public.