


15-039-00557-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

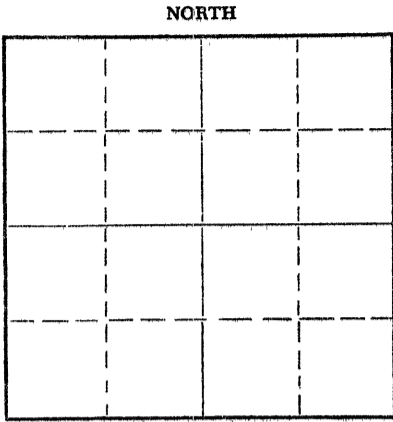

DECATUR County, Sec. 5 Twp. 3S Rge. 29W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SW NE  
Lease Owner UNION TEXAS PETROLEUM  
Lease Name POLLNOW "B" Well No. 1  
Office Address 1740 BROADWAY, DENVER, COLORADO  
Character of Well (completed as Oil, Gas or Dry Hole) OIL WELL  
Date well completed DECEMBER 22 19 53  
Application for plugging filed JANUARY 8 19 66  
Application for plugging approved JANUARY 10 19 66  
Plugging commenced FEBRUARY 15 19 66  
Plugging completed FEBRUARY 17 19 66  
Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well W.L. NICHOLS  
Producing formation Depth to top Bottom Total Depth of Well 3920 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	201'	NONE
				5 1/2"	3919'	1189'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3919' - 3700' - PLUG  
3700' - 3680' - SAND  
3680' - 3640' - 5 SACKS CEMENT  
3640' - 331' - MUD  
331' - 321' - ROCK BRIDGE  
321' - 306' - 5 SACKS CEMENT  
306' - BASE - 5 YARDS READY-MIX CEMENT

RECEIVED  
STATE CORPORATION COMMISSION

MAR 3 1966

3-3-66  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC  
Address BOX 562, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.  
T.L. NUTT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T.L. Nutt  
BOX 562, GREAT BEND, KANSAS  
(Address)

SUBSCRIBED AND SWORN to before me this 28 day of FEBRUARY, 19 66.  
Mary M. Sweeney  
Notary Public.

My commission expires JULY 31, 1966