

15-039-00556-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

DECATUR

County. Sec. 5 Twp. 3S Rge. 29W (E) (W)

Location as "NE/CNW/SE" or footage from lines NW NW SE
Lease Owner UNION TEXAS PETROLEUM
Lease Name BOETTGER Well No. 1
Office Address 1740 BROADWAY, DENVER, COLORADO
Character of Well (completed as Oil, Gas or Dry Hole) OIL WELL
Date well completed DECEMBER 4 19 53
Application for plugging filed JANUARY 8 19 66
Application for plugging approved 19
Plugging commenced FEBRUARY 8 19 66
Plugging completed FEBRUARY 11 19 66
Reason for abandonment of well or producing formation DEPLETED

NORTH

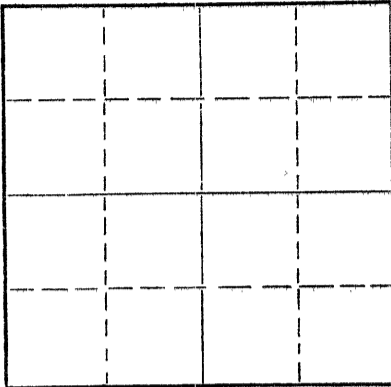

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well W.L. NICHOLS

Producing formation Depth to top Bottom Total Depth of Well 4210 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	211'	NONE
				5 1/2"	3913	1024'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3913' - 3690' - PLUG
3690' - 3660' - SAND
3660' - 3620' - 5 SAX CEMENT
3620' - 350' - MUD
350' - 340' - ROCK BRIDGE
340' - 325' - 5 SAX CEMENT
325' - BASE - 5 YARDS READY-MIX CEMENT

RECEIVED
MAR 3 1966
3-3-66
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC.
Address BOX 562, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.

T.L. NUTT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

BOX 562, GREAT BEND, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 28 day of FEBRUARY, 19 66

My commission expires JULY 31, 1966

Mary M. Greenier
Notary Public.