

15-039-00590-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Decatur County, Sec. 5 Twp. 3S Rge. 29 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SE SE

Lease Owner Bulldog Pipe and Supply Co.

Lease Name Boettger Well No. 2

Office Address P. O. Box 1153, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 19 19 66

Application for plugging filed August 27 19 66

Application for plugging approved September 19 66

Plugging commenced September 21 19 66

Plugging completed September 27 19 66

Reason for abandonment of well or producing formation Depleted


If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3940 Feet

Show depth and thickness of all water, oil and gas formations.

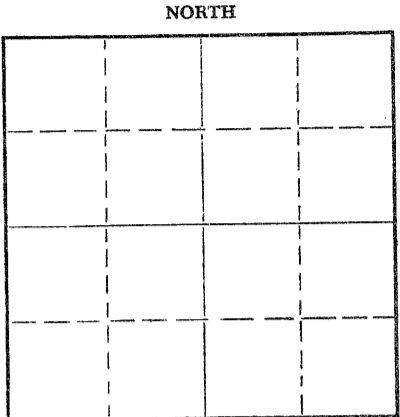

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled back with rock to 3930'. Dumped 5 sacks of cement. Shot pipe off at 1702.10'. Pulled pipe. Tied into surface pipe with Halliburton and squeezed with 30 sacks of Jel-Mud and then pumped in 75 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 20 1966  
10-20-66  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self  
Address R. R. #11, Hutchinson, Kans.

STATE OF Kans., COUNTY OF Reno, ss.  
Employee (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) Bert Self  
R. R. #11, Hutchinson, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of October, 19 66

My commission expires October 18, 1969

Notary Public

15-039-00550-00-00

DRILLER'S LOG

Operator: Anderson-Prichard Oil Corp.  
Farm Name: B oettger >

Location: SE SE SE Sec. 5  
38-29W  
Decatur County Kansas

*polluted area # 9*

Contractor: Sauvage & Dunn Drig. Co., Inc. Casing Record 165' 8 5/8" csg.

Elevation:

*1742 201155*

Figures dinote bottom of formation

Cellar	5
Shale	872
Shale & shells	1456
Shale & Shells	1930
Shale & Shells	2070
Anhydrite	2100
Shale & Shells	2150
Shale & Shells	2400
Shale	2340
Shale & red bed	2690
Shale & red bed	2820
Shale & Lime	2915
Lime & Shale	3130
Lime	3180
Shale & Lime	3375
Shale & Lime	3605
Lime	3680
Lime & Shale	3745
Lime	3810
Shale & Lime	3890
Lime	3940
Rotary total depth	3940

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 2 1955  
9-2-55  
CONSERVATION DIVISION  
Wichita, Kansas

CERTIFICATE

State of Kansas  
Decatur County

I hereby Certify that the foregoing is , to the best of my knowledge and belief a full, true and correct drilling log as shown by the daily drilling reports in connection with the aforesaid well.

*Arnal Sauvage*  
For Sauvage & Dunn Drig. Co. Inc.

This 14th Subscribed and sworn to before me the undersigned, a Notary Public  
Day of June 1955.

*Collen Kathke*  
Notary Public

My Commission expires 2/14/59