

15-039-30061-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Decatur County, Sec. 33 Twp. 3S Rge. 28 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C NE SW  
Lease Owner Halliburton Oil Producing Company  
Lease Name Vavroch Well No. 12  
Office Address Cameron Bldg., 2915 Classen Blvd., Oklahoma City, Okla.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed February 23 1966  
Application for plugging filed February 23 1966  
Application for plugging approved February 23 1966  
Plugging commenced February 23 1966  
Plugging completed February 23 1966  
Reason for abandonment of well or producing formation Dry Hole

NORTH

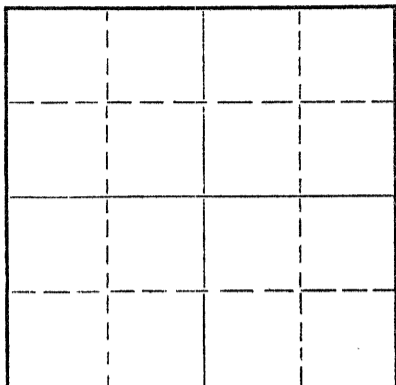

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Morland, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 3942 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUL IN	PULLED OUT
		0	257	7"	257	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole plugged with heavy mud and 15 sx cement @ 540 ft.;  
15 sx cement @ 250 ft.; 10 sx cement @ 40 ft. to surface.

RECEIVED  
STATE CORPORATION COMMISSION

MAR 2 1966

CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Paine Drilling Co., Inc.  
Address P. O. Box D, Hill City, Kansas

STATE OF Kansas, COUNTY OF Graham, ss.  
D. F. McCarthy (employee of owner) or (owner) or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. F. McCarthy  
P. O. Box D, Hill City, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of February, 1966

My Commission Expires January 28, 1968

Caro J. J. J.

Notary Public.

My commission expires \_\_\_\_\_

15-039-30061-00-00

CONTRACTOR'S WELL LOG

COMPANY: Halliburton Oil Producing Company  
 CONTRACTOR: Paine Drilling Co., Inc.  
 WELL: Vavroch # 12  
 LOCATION: C NE SW Section 33-3S-28W  
 Decatur County, Kansas  
 COMMENCED: February 14, 1966  
 COMPLETED: February 23, 1966

0	183	Clay, Sand & Gravel
183	258	Sand & Shale
258	1800	Shale
1800	1820	Sand
1820	2115	Shale
2115	2205	Sand
2205	2401	Shale & Redbed
2401	2433	Anhydrite
2433	2808	Shale
2808	3745	Shale & Lime
3745	3792	Lime & Chert
3792	3942	Lime
3942		Rotary Total Depth

RECEIVED  
 STATE COMMISSION (KANSAS)  
 MAR 2 1966  
 3-2-66

Set 7-inch Surface Pipe @ 257 ft. with 125 sx cement.

Dry & Abandoned.

We hereby certify that the above is a correct and accurate log of the above mentioned well, as shown on the daily drilling reports.

PAINE DRILLING CO., INC.

BY: *R. J. McCarthy*

Subscribed and sworn to before me this 28th day of February, 1966.

My Commission Expires January 26, 1968

*Carla Trecker*  
Notary Public