


15-023-20013-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

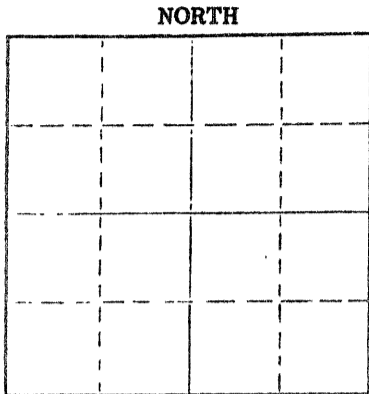

Locate well correctly on above Section Plat

Cheyenne County. Sec. 20 Twp. 3S Rge. 10W (or) (W)  
Location as "NE/CNW&SW" or footage from lines SW NE  
Lease Owner Kansas-Nebraska Natural Gas Company, Inc.  
Lease Name Zweygardt #1 Well No. 1  
Office Address 5715 West 11th Avenue, Lakewood, Colorado 80214  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed February 6, 1976 19  
Application for plugging filed February 8, 1976 19  
Application for plugging approved February 8, 1976 19  
Plugging commenced 12:15 AM, February 9, 1976 19  
Plugging completed 1:15 AM, February 9, 1976 19  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 1383' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"	335'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud.  
50 sacks 50/50 Pozmix at 1000'.  
30 sacks 50/50 Pozmix at 300'.  
20 sacks 50/50 Pozmix at surface.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sterling Drilling Company  
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE, ss.


F. A. Wuellner, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) FA WUELLNER by TJC  
F. A. Wuellner, Secretary  
P. O. Box 129, Sterling, Kansas 67579  
(Address)

Subscribed and sworn to before me this 12th day of February, 19 76

**CHARLES HALL—NOTARY PUBLIC**  
My Commission Expires Jan. 9, 1977

Charles M. Hall,  
Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION

FEB 26 1976  
2-26-76  
CONSERVATION DIVISION  
Wichita, Kansas

15-023-20013-00-00

STERLING DRILLING COMPANY  
P. O. Box 129  
Sterling, Kansas 67579

WELL LOG ----- ZWEYGARDT #1  
Located: SW NE, Section 20-38-40W, Cheyenne County,  
Kansas

OWNER: Kansas-Nebraska Natural Gas Company, Inc.  
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: February 6, 1976  
COMPLETED: February 9, 1976

TOTAL DEPTH: 1383'

<u>LOG</u>		<u>CASING RECORD</u>
0 - 60	Gravel and Clayballs	Ran 11 joints used 7" casing, 333.60' set at 335' G.L. with 100 sacks regular cement, with 2% cc and 2% salt. Plug down at 3:10 AM, 2-7-76.
60 - 333	Clay and Shale	
333 - 1383	Shale	

Plugged.

FEB 26 1976

STERLING DRILLING COMPANY  
P. O. Box 129  
STERLING, KANSAS 67579