


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

15-023-30038-00-00  
WELL PLUGGING RECORD

Cheyenne County, Sec. 13 Twp. 3 Rge. 42 (E) (W)

Location as "NE/CNW/SW" or footage from lines C NW NE  
Lease Owner Herman George Kaiser  
Lease Name Rueb Well No. 2  
Office Address Ellinwood, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 5-26 19 61  
Plugging completed 6-2 19 61  
Reason for abandonment of well or producing formation

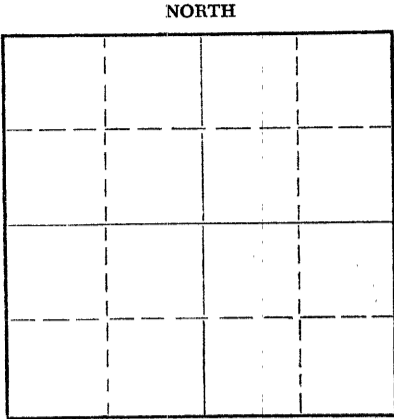

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker  
Producing formation Depth to top Bottom Total Depth of Well 4622 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	237'	None
				5 1/2	4621'	2031'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug @ 4567  
Top Perforation 4544

Sanded to 4530' - dumped 5 sks cement - pulled casing - mudded hole to 230' - set 10' rock bridge - dumped 25 sks cement - mudded hole to 35' - set 5' rock bridge - dumped 10 sks cement

RECEIVED  
STATE CORPORATION COMMISSION

AUG 17 1961

8-17-61  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & D Casing Pulling Co License # 236  
Address Box # 572 Hutchinson, Kansas

STATE OF Kansas COUNTY OF Barton, ss.  
W J Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W J Hall

(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of August, 1961

Evelyn S. Muller  
Notary Public.

My commission expires



Commission Expires Feb. 25, 1963

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas


COPY  
15-023-30038-00-00

Company- R. G. LAWTON  
Farm- J. Rueb No. 2

SEC. 13 T. 3 R. 42W  
C NW NE

Total Depth. 4617'  
Comm. 8-1-59 Comp. 8-7-59  
Shot or Treated.  
Contractor. Reaves Drlg.  
Issued. 7-22-61

County Cheyenne  
KANSAS



CASING:  
5" 4621'

Elevation. 3654'

Production. 25 BOPD

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS: SCOUT	
Niobara	1512
Ft. Hays	2048
Carlisle	2138
Greenhorn	2338
Dakota	2538
Lacota	2860
Blaine	3310
Stone Corral	3498
Ft. Riley	3670
Neva	3947
Howard	4290
Topeka	4337
Lansing	4483
Total Depth	4617