

15-147-30138-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Phillips County, Sec. 28 Twp. 4s Rge. (E) 18 (W)
C NE NW

Location as "NE/CNW/SW" or footage from lines
Lease Owner James W. Hershberger
Lease Name Bredemier Well No. 4
Office Address 807 First Natl. Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed January 22 19 68
Application for plugging approved 19
Plugging commenced January 23 19 68
Plugging completed January 25 19 68
Reason for abandonment of well or producing formation depleted

NORTH

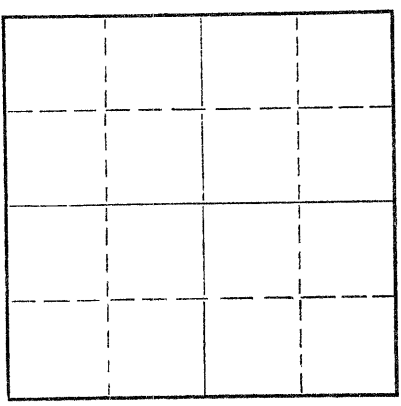

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3350' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	202'	none
				4-1/2"	3339'	1184.39

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3350' - 3150' - plug
 3150' - 3100' - sand
 3100' - 3052' - 4 sacks cement
 3052' - 420' - pumped 30 sacks gel mud and 5 sacks of hulls
 420' - base - pumped 140 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
FEB 12 1968
CONSERVATION DIVISION
Wichita, Kansas

2-12-68

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Santa-Fe Pipe & Supply, Inc.,
Address P. O. Box 562, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
T. L. Nutt (employee of owner) or (XXXXXX) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. L. Nutt
Box 562, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of February, 19 68

My commission expires July 31, 1970
Mary M. Guenies Notary Public.