

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**

RECEIVED  
KANSAS CORPORATION COMMISSION  
SEP 23 2004  
CONSERVATION DIVISION  
WICHITA, KS

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

API # 15 - 097-10148-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 08/18/62 Spud.

Well Operator: Chesapeake Operating, Inc. KCC License #: 32334  
(Owner / Company Name) (Operator's)

Address: P. O. Box 18496 City: Oklahoma City

State: OK Zip Code: 73154-0496 Contact Phone: (405) 848-8000

Lease: Runnymede B Well #: 1-23 Sec. 23 Twp. 30 S. R. 17  East  West

SE Spot Location / QQQQ County: Kiowa

1800-1320 Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)

1450(1320) Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 8-5/8 Set at: 523 Cemented with: 300 Sacks

Production Casing Size: 4-1/2 Set at: 4953' Cemented with: 125 Sacks

List (ALL) Perforations and Bridgeplug Sets: 4931' - 4935'

Elevation: 2065 ( G.L. /  K.B.) T.D.: 4955' PBTD: \_\_\_\_\_ Anhydrite Depth: \_\_\_\_\_  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): MIRU cementers, dig out bradenhead, TOOH rods & pump & tbg, stand back ± 1000' tbg. Mix & Pump 25 sx cmt w/200% cotton seed hulls, displace w/gel; RIH w/tbg to 1000', mix & pump 50 sx plug, displace w/gel, POOH, LD tbg. MIRU WL, perf @ ± 350', establish circ. up 4-1/2" x 8-5/8" snnulus, mix & pump cmt, circ cmt to surface, weld on cap, clean up location.

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? \_\_\_\_\_

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: \_\_\_\_\_

Bud Neff Phone: (620) 277-0803

Address: 4532 W. Jones Avenue City / State: Garden City, KS 67846

Plugging Contractor: Allied Cementing Co., Inc. KCC License #: \_\_\_\_\_  
(Company Name) (Contractor's)


Address: P. O. Box 31, Russell, KS 67665 Phone: (785) 483-2627

Proposed Date and Hour of Plugging (if known?): \_\_\_\_\_

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 09/20/04 Authorized Operator / Agent: Jim Reisch (Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

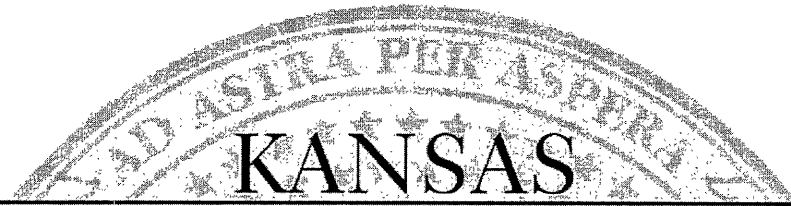

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Chesapeake Operating, Inc.  
PO Box 18496  
6200 N Western Ave.  
Oklahoma City, OK 73154-0496

September 28, 2004

Re: RUNNYMEDE UNIT B #1-23  
API 15-097-10148-00-00  
SE 23-30S-17W, 1320 FSL 1320 FEL  
KIOWA COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888

Sincerely

David P. Williams  
Production Supervisor