


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

NORTH

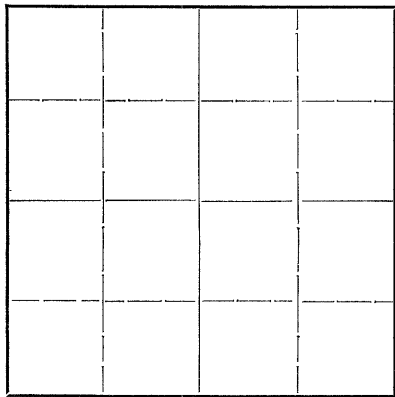

Locate well correctly on above
Section Plat

Phillips County. Sec. 24 Twp. 4 Rge. 20 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines C S/2 SE SW
Lease Owner Lario Oil & Gas Company
Lease Name Lynch Estate Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date, well completed July 16 19 41
Application for plugging filed July 22 19 41
Application for plugging approved July 25 19 41
Plugging Commenced September 23 19 41
Plugging Completed September 25 19 41
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander
Producing formation Depth to top Bottom Total Depth of Well 3,848 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 1/4"	184' 8"	None
				5 3/16"	3354' 5"	3050' 1"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole was plugged back from 3,848' to 3,281' with 41 sacks cement, 150# lead wool and 1 wood expansion plug. Hole was filled with mud from 3,281' to 3,246' and cement from 3,246' to 3,226', mud from 3,226' to 189', a permanent bridge was placed at 189' and cement was used to 169', mud to 30' and cement from 30' to 8', mudded to top of surface.

IG
24 4 20W
148 22

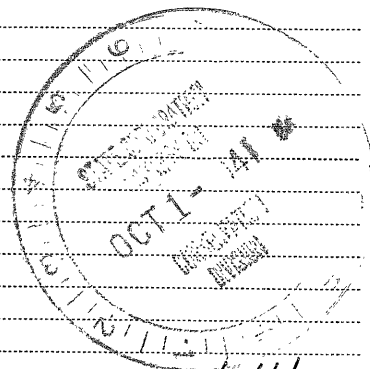

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Lario Oil & Gas Company
Address 301 South Market Street
Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Leo Ross (employee of owner) or (operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo Ross
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 30 day of September 19 41
Margaret Brown
Notary Public.

My commission expires June 17, 1944



15-147-00012-00-00

LARIO OIL & GAS CO.
 Lynch Estate No. 1.

SEC. 24 T. 4 R. 20 W
 CS $\frac{1}{2}$ SE SW

Total Depth. 3848' DF
 Comm. 6-11-41 Comp. 7-16-41
 Shot or Treated.
 Contractor.
 Issued. 12-13-41

County. Phillips



CASING:
 8 1/4" 184'8"
 5 3/16" 3354'5" (P 3050')

Elevation.

Production. Dry

Figures Indicate Bottom of Formations.

surface	0-184
shale	425
sand	470
shale & shells	630
sand	670
shale	727
sand	915
sdv shale	990
sand	1265
shale	1480
sdv shale	1543
lime	1567
shale & shells	2135
lime	2150
shale & shells	2340
lime	2400
shale	2485
lime	2491
shale & shells	2578
lime	2654
shale & shells	2790
lime	2810
shale	2874
lime	3370
shale	3388
lime	3409
shale	3430
conglomerate	3470
lime	3542
lime & chert	3551
sand	3594
lime	3847
granite	3848 DF
Total Depth.	

66 perforations 3318 to
 3246'6"

190 Gals. Acid

Dry & Abnd.

24 4 20W
 148 22

LARIO OIL & GAS COMPANY

PRODUCERS



15-147-00012-00-00

WICHITA, KANSAS

September 30, 1941.

Kansas State Corporation Commission,
800 Bitting Building,
Wichita, Kansas.



Gentlemen:

Enclosed find certified copy of Well
Plugging Record on our Lynch Estate Well No. 1,
located in the C S/2 SE SW, Section 24, Township
4, Range 20W, Phillips County, Kansas.

Yours very truly,

PRODUCTION DEPARTMENT.

LLR:FD
Encl.

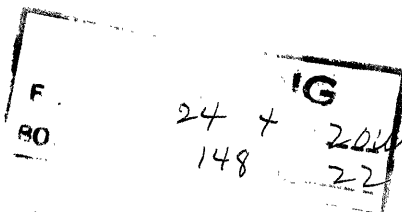

10-1-41