


15-147-20141-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Phillips County, Sec. 23 Twp. 4 Rge. 20 (E) (W) X
Location as "NE/CNW/SW" or footage from lines NW SE NE
Lease Owner A. L. Abercrombie Inc.
Lease Name Patton Well No. #1
Office Address 801 Union Center Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 4-4-72 19
Plugging commenced 4-13-72 19
Plugging completed 4-19-72 19
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3586' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3585'	2535.76'
				8 5/8"	199'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3275'. Mixed and ran 4 sacks cement thru dump bailer.
Squeezed hole with 3 sacks hulls, 20 sacks gel, 3 sacks hulls and 70 sacks cement 10 sacks gel. Released plug and displaced with 50 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
APR 21 1972
CONSERVATION DIVISION
Wichita, Kansas


4-21-72

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 20 day of April, 1972

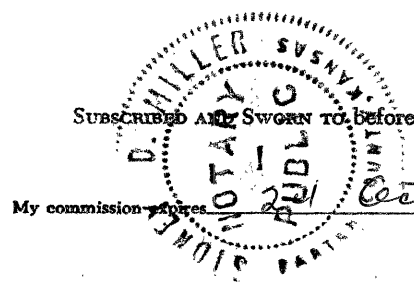

Sidney D. Miller
Notary Public.

15-147-20141-00-00

CONTRACTOR'S WELL LOG

OPERATOR:	Abercrombie Drilling, Inc.
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	PATTON #1
LOCATION:	NW SE NE, Sec. 23-4S-20W Phillips County, Kansas
GEOLOGIST:	Jack K. Wharton
SPUD DATE:	November 22, 1971
COMPLETION DATE:	November 30, 1971

0	70	Clay & Rock
70	675	Shale
675	860	Sand
860	1150	Shale
1150	1360	Sand
1360	1639	Red Shale
1639	1668	Anhydrite
1668	1960	Shale
1960	2260	Shale w/lime Streaks
2260	2670	Lime & Shale
2670	2860	Lime
2860	2988	Lime & Shale
2988	3585	Lime
	3585	Rotary T.D.

Drilled 210' of 12½" surface hole. Set 8-5/8" surface csg. at 207' K.B. w/140 sx. Sunset cement. Cement circulated. Plug was down at 7:30 p.m. 11-22-71. Ran 4½" csg., set at 3585'. Cemented w/50 sx. 50/50 posmix w/2% gel, 12 lbs. gilsonite per sack and 150 sx. common cement w/10% salt, 1% c.c., 2% gel and 6 lbs. friction reducer. Job was completed at 12:30 p.m. 11-30-71.

ELECTRIC LOG TOPS

ELEVATION

Anhydrite	1637 (+ 460)	2097 K.B.
B/Anhydrite	1664 (+ 443)	2095 D.F.
Heebner	3216 (-1119)	2089 G.L.
Toronto	3244 (-1147)	
Lansing	3259 (-1162)	
Arbuckle	3538 (-1441)	
ELTD	3586 (-1489)	

RECEIVED
STATE CORPORATION COMMISSION
APR 4 - 1972
CONSERVATION DIVISION
Wichita, Kansas
4-4-72

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Jerry A. Langrehr, President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the PATTON #1, NW SE NE, Sec. 23-4S-20W, Phillips County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr
Jerry A. Langrehr
President

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 2nd day of December, 1971.

Beverly Mann
Beverly Mann, Notary Public

My Commission Expires:

February 10, 1975