

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
130 S. Market, Room 2078  
Wichita, KS 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-051-21799-00-00

LEASE NAME Adams

WELL NUMBER 1-18

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

330 Ft. from S Section Line

2310 Ft. from E Section Line

SEC. 18 TWP. 13<sup>S</sup> RGE. 19 (E) or (W)

COUNTY Ellis

LEASE OPERATOR Berexco, Inc.

ADDRESS P.O. Box 723 Hays, KS 67601

PHONE (785) 628-6101 OPERATORS LICENSE NO. 5363

Character of Well oil

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Date Well Completed 9-30

Plugging Commenced 9-28-04

Plugging Completed 10-7-04

KCC  
BEM  
10-12-04

The plugging proposal was approved on \_\_\_\_\_ (date)

by \_\_\_\_\_ (KCC District Agent's Name).

Is ACQ-1 filed? yes If not, is well log attached? n/a

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 3850

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plug were used, state the character of same and depth placed, from feet to feet each set:  
Rig up Allied. Mix 50 sx 60/40 pos w/10% gel w/300# hulls. Displace to 2100' back off fish @ 3185 Pull tbg. Rig up Perf Tech. Perf 2 holes @ 2100' 1520' 750' Pull tbg to 2100'. Mix 80 sx w/200# hulls. Pull tbg to 1500' Mix 65 sx circ cement to surface. Pull rest of tbg. Mix 35 sx Pump down CSG. @n vac. Pump 50SX down 8 5/8 Max Press 350# Shut in 50# State rep Pat Staab.

Name of Plugging Contractor Berexco, Inc. License No. 5363 9998

Address P.O. Box 723 Hays, KS 67601

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Berexco, Inc.

STATE OF Kansas COUNTY OF Ellis, ss.

Curt Gabel (Employee of Operator) or (Operator) o above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained and the log of the above-described well as filed the the same are true and correct, so help me God.



(Signature) Curt Gabel

(Address) P.O. Box 723, Hays, KS 67601

SUBSCRIBED AND SWORN TO before me this 4th day of October 2004

Marion Sue Vance  
Notary Public

My Commission Expires: 4-30-06

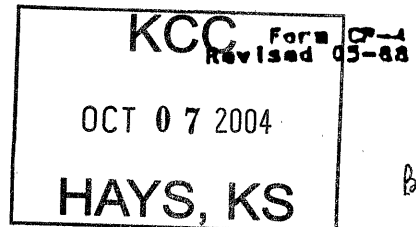

RECEIVED  
OCT 8 2004  
10-08-04  
KCC/MIC/UTA

BW