

15-137-20240-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Bldg.  
Wichita, Kansas 67202

Form CP-4  
Rev. 12-15-80  
RECEIVED  
STATE CORPORATION COMMISSION


JAN 03 1983  
1-3-83

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit

CONSERVATION DIVISION  
Wichita, Kansas

COUNTY Norton SEC. 23 TWP. 4S RGE. 23 EW  
Location as in quarters or footage from lines:  
C SW SE Section 23

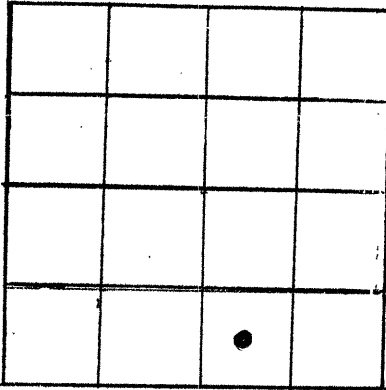

Locate Well  
correctly on above  
Section Platt.

Lease Owner William E. Carl  
Lease Name Ward Well No. 1-23  
Office Address 5700 S. Quebec, Suite 105, Englewood, CO 80111  
Character of Well (Completed as Oil, Gas or Dry Hole): Oil  
Date Well Completed July 23, 1981  
Application for plugging filed November 18, 1982  
Plugging commenced December 6, 1982  
Plugging completed December 16, 1982  
Reason for abandonment of well or producing formation Non-Commercial

Was permission obtained from the Conservation Division or it's Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Dennis Hamil  
Producing formation Reagan Depth to top 3699 bottom 3723 T.D. 3755

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Reagan	Oil & Water	3699	3723	8 5/8	403	- 0 -
				4 1/2	3755	1004

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

12/6 - 12/7 Sand to 3720. 5 sx cement plug from 3670 to 3720. 25' sand from 3645 to 3670. 5 sx cement plug from 3595 to 3645. Shot 2 holes at 1940 in Anhydrite. Shot casing at 1004 and POH.

12/16 - Plugged by pumping: 30 sx 50/50 w/6% gel, 30 sx cement w/100# Hulls, 3 sx gel, 70 sx cement w/100# Hulls, 15 sx gel, release wiper plug, 70 sx cement w/100# Hulls.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pfeifer Well Service

STATE OF Colorado COUNTY OF Arapahoe, ss.  
Dennis Barry (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dennis Barry  
5700 S. Quebec, Suite 105  
Englewood, CO 80111 (Address)

SUBSCRIBED AND SWORN TO before me this 30<sup>th</sup> day of Dec., 1982

Evelyn J. Roberts  
EVELYN J. ROBERTS Notary Public.

My Commission expires: 16 Jan. 1983