

18-137-20035-00-01

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Norton County, Sec. 23 Twp. 4 Rge. 23 (E) (W) X

Location as "NE/CNW/SW" or footage from lines C SW SW

Lease Owner B. E. Shelton

Lease Name Doolittle

Well No. 1 (OWN)

Office Address 102 Insurance Building Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Date well completed \_\_\_\_\_ 19\_\_

Application for plugging filed 6-8-70 \_\_\_\_\_ 19\_\_

Application for plugging approved 6-9-70 \_\_\_\_\_ 19\_\_


Plugging commenced 6-11-70 \_\_\_\_\_ 19\_\_

Plugging completed 6-23-70 \_\_\_\_\_ 19\_\_

Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

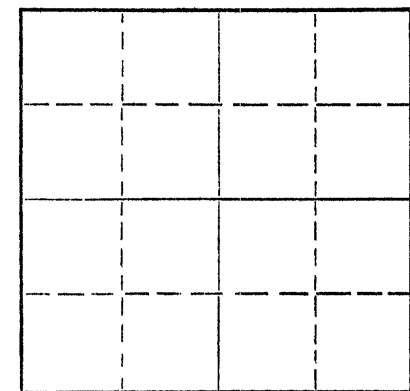

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3830 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	286	None
				4 1/2	3825	2238.55

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved to location and spotted trailer. Shut down for hard rain storm

Checked location -- too muddy.

Rigged up pole. Sanded to 3300' and dump 3 sacks of cement. Rigged up jacks, had 15" tension.

Shot casing at 2900' and worked casing. Tried to spot 5 sacks mud, 3 hulls and 70 bbls. oil. Couldn't displace oil at 2300 psi.

Shot casing at 2200' and spotted oil at 1,100 psi.

Working casing. Pulled total of 55 joints of 4 1/2" casing.

Loaded trailer. Tore down rig and moved off location.

Allied Cementing squeezed well with 5 sacks of hulls, 30 sacks of mud and 130 sacks of 50/50 poz mix cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.

Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.


James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
P. O. Box 221 Great Bend, Kansas

(Address)

Subscribed and sworn to before me this 25 day of June, 19 70

My commission expires May 27, 1973



Notary Public.