


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

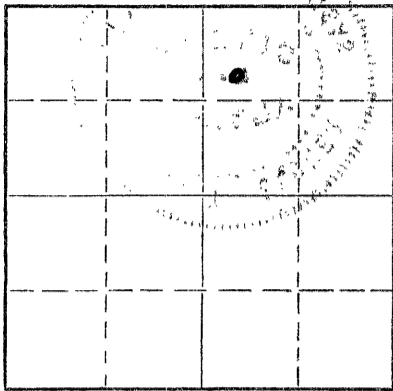

Locate well correctly on above Section Plat

Norton County, Sec. 11 Twp. 4 Rge. 21 (E) (W)
Location as "NE/CNW/SW" or footage from lines SW NW NE
Lease Owner National Associated Petroleum Company
Lease Name Nuttycomb Well No. 1
Office Address Pawhuska, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed June 20 19 68
Application for plugging filed " 27 19 68
Application for plugging approved " 28 19 68
Plugging commenced 7/3/68 19
Plugging completed 7/7/68 19
Reason for abandonment of well or producing formation ~~depleted~~ dry hole

If a producing well is abandoned, date of last production - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3536 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
KC	oil & water	3428	3450	8-5/8"	192'	none
				5 1/2"	3584'	1969'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Checked hole to 3508', ran sand to 3400' and ran 5 sacks of cement. Shot pipe at 2905', 2533', 2221', 1980', pulled 62 joints. Pumped 5 sacks hulls, 12 mud and 100 cu. ft. of cement, 13 gel and 20 cu. ft. cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
JUL 12 1968
CONSERVATION DIVISION
Wichita, Kansas
7-12-68

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well is true and that the same are true and correct. So help me God.



(Signature) Noel J. Knight
CHASE, KANSAS
(Address)

Subscribed and sworn to before me this 9th day of July, 19 68
Margaret Melcher
Notary Public.