

15-137-00721-00-00

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

Norton County. Sec. 11 Twp. 4S Rge. (E) 21 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. C S/2 SW/4 NE/4

Lease Owner. Helmerich & Payne, Inc.

Lease Name. Hewett Well No. 2

Office Address. 415 Philtower Building, Tulsa 3, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole). Oil Well

Date well completed. 7-18-1946

Application for plugging filed. 6-26-1946

Application for plugging approved. 6-29-1946


Plugging commenced. 7-8-1946

Plugging completed. 7-10-1946

Reason for abandonment of well or producing formation. Oil depleted

If a producing well is abandoned, date of last production. 6-25-46 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

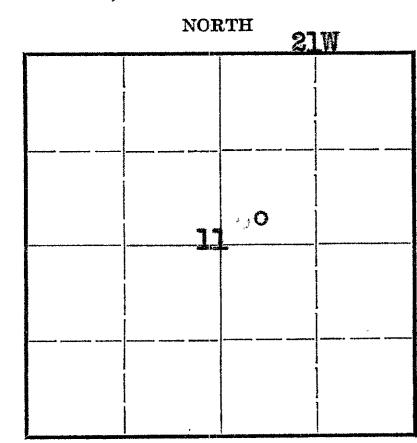

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well. Mr. Kerr

Producing formation. Lansing Depth to top. 3367' Bottom. Total Depth of Well. 3380' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Anhydrite	Dry	1785		10-3/4"	252'	None
				7"	3369'	229'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dump/sacks of cement at 3382'. Mud hole to 240', dump rock bridge and 15 sacks of cement. Mud hole to 15', dump rock bridge and 10 sacks of cement to surface.

11 4 21W
60 27

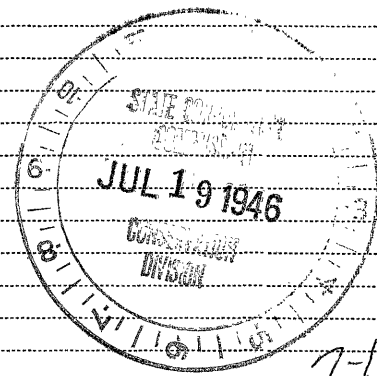

7-19-46

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Helmerich & Payne, Inc.
Address. 415 Philtower Building
Tulsa 3, Oklahoma

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.

Charles F. King, Chief Production Clerk, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles F. King

415 Philtower Building, Tulsa 3, Oklahoma (Address)

SUBSCRIBED AND SWORN TO before me this 18th day of July, 1946

Shirley Griffin
Notary Public.

My commission expires July 22, 1947.

Hewett #2
310' From the South Line & 310' From the West Line of the
NE 1/4 of Section 11-4S-21W
Norton County, Kansas.
Phillips Petroleum Company 13-137-00727-00-00
And
Helmerich & Payne, Inc.

Commenced: August 26, 1941.
 Completed: Sept. 11, 1941.

Surface clay and shells	0	50
Shale and shells	50	1150
Sand	1150	1190
Sandy shale	1190	1210
Lime	1210	1260
Sandy shale and shells	1260	1400
Sand	1400	1510
Shale and shells (red)	1510	1740
Red shale and pyrite	1740	1785
Anhydrite	1785	1825
Red shale and lime	1825	1920
Shale and shells	1920	2195
Broken lime	2195	2375
Lime and shale	2375	2420
Lime	2420	2490
Broken lime	2490	2545
Lime and shale	2545	2645
Lime, broken	2645	2695
Lime	2695	2935
Lime, broken	2935	3205
Lime	3205	3220
Lime, broken	3220	3275
Lime	3275	3320
Broken lime	3320	3380
TOTAL DEPTH	3380	

CASING RECORD

10-3/4" O. D. Surface Casing set at 252' and cemented with 200 sacks of cement.

7" O. D. Casing set at 3569' and cemented with 700 sacks of cement.

STATE OF OKLAHOMA)
) ss
 COUNTY OF TULSA)

I hereby affirm that the above and foregoing is a true and correct copy of the log of the Hewett Well #2, located 310' From the South Line and 310' From the West Line of the Northeast Quarter of Section 11, Township 4 South, Range 21 West, Norton County, Kansas.

HELMERTON & PAYNE, INC.

11. 4. 214
 60. 27

William B. Payne
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 22nd. day of October, 1941.

Geo. Hippen
 Notary Public

My commission expires: July 22, 1943.