

15-137-00306-0000

# WELL PLUGGING RECORD

STATE OF KANSAS  
STATE CORPORATION COMMISSION

## FORMATION PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

Strike out upper line  
when reporting plugging  
of formations.

Norton County. Sec. 11 Twp. 4S Rge. (E) 21 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C S/2 SE NE

Lease Owner Helmerich & Payne, Inc.

Lease Name Hewett Well No. 1

Office Address 415 Philtower Bldg., Tulsa 3, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Oil well

Date well completed 7-21 1941

Application for plugging filed 6-26 1946

Application for plugging approved 6-29 1946


Plugging commenced 7-1 1946

Plugging completed 7-5 1946

Reason for abandonment of well or producing formation Oil depleted

If a producing well is abandoned, date of last production 6-25-46 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

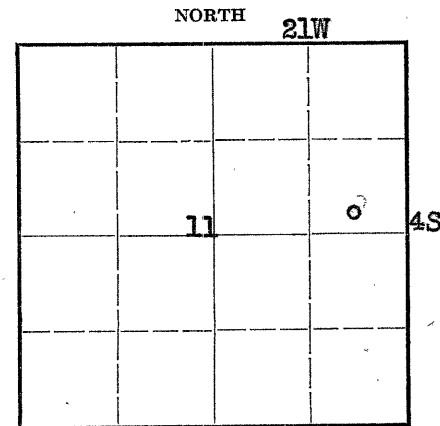

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Kerr

Producing formation Lansing Depth to top 3204' Bottom Total Depth of Well 3750' Feet

Show depth and thickness of all water, oil and gas formations.

### OIL, GAS OR WATER RECORDS

### CASING RECORD

| Formation | Content | From | To | Size   | Put In | Pulled Out |
|-----------|---------|------|----|--------|--------|------------|
| Topeka    | Dry     | 3194 |    | 8-5/8" | 267'   | None       |
| Arbuckle  | Dry     | 3655 |    | 5-1/2" | 3401'  | 2830'      |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dump 8 sacks of cement at 3750' and fill to 3400' with sand and dump 6 sacks of cement. Mud hole to 250', dump rock bridge and 15 sacks of cement. Mud hole to 15', dump rock bridge and 10 sacks of cement to surface.

PLUGGING  
FILE 11 4 21W  
BOOK PAGE 60 LINE 26

JUL 18 1946  
7-18-46

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Helmerich & Payne, Inc.  
Address 415 Philtower Bldg.  
Tulsa 3, Oklahoma

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.

Charles F. King, Chief Production Clerk (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles F. King

415 Philtower Building, Tulsa 3, Oklahoma  
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of July 1946

[Signature of Notary Public]

Notary Public.

My commission expires July 23, 1947



15-137-00306-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA 2, KANSAS

July 18, 1946

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

Wilmington & Rogers, Inc.  
415 Millhouse Bldg.  
Tulsa, Oklahoma

IN ACCOUNT WITH Conservation Division, State Corporation Commission  
Wichita, Kansas

WE Charge YOU

Plugging Assessment.....\$

*Pd.  
8/6/46  
KCR*

Well No. 1  
Farm South  
Description 4 1/2 ac on NW 1/4-116  
County Barton  
File: 22-25

The assessment for the plugging of all wells in the State of Kansas is one cent per foot, with a maximum of \$25.00 and a minimum of \$5.00.

This assessment will be past due August 4, 194 6

PLEASE RETURN ONE COPY WITH REMITTANCE

NOTE: We also need a plugging record covering this well, to complete the file.

ATTACHED FIND CHECK IN PAYMENT AS FOLLOWS:

15-137-00306-00-00

7-16-46 Invoice - Hewett #1  
File: 60-26  
Plugging Assessment

\$ 25.00

CHECK NO. **93590**

VO. NO.

TEAR OFF AT PERFORATION AND  
KEEP FOR REFERENCE

**Helmerich & Payne, Inc.**

13-137-00306-00-00

D. H. Hewitt #1  
S/2 S/4 N/4 of Section 11-41-21E,  
Worton County, Kansas  
Phillips Petroleum Company  
and  
Helmerich & Payne, Inc.

Commenced: June 14, 1941  
 Completed: July 21, 1941

|                        |      |             |
|------------------------|------|-------------|
| Sand                   | 0    | 170         |
| Sand, shale and shells | 170  | 407         |
| Sand and shale         | 407  | 440         |
| Shale                  | 440  | 505         |
| Shale and shells       | 505  | 505         |
| Sand                   | 505  | 555         |
| Shale and shells       | 555  | 1190        |
| Sand                   | 1190 | 1280        |
| Line                   | 1280 | 1345        |
| Sand                   | 1345 | 1525        |
| Shale                  | 1525 | 1555        |
| Sand                   | 1555 | 1595        |
| Shale                  | 1595 | 1675        |
| Red bed                | 1675 | 1715        |
| Shale                  | 1715 | 1815        |
| Anhydrite              | 1815 | 1845        |
| Shale and lime         | 1845 | 1875        |
| Broken lime            | 1875 | 2020        |
| Shale and shells       | 2020 | 2250        |
| Lime                   | 2250 | 2250        |
| Shale                  | 2250 | 2300        |
| Shale and lime         | 2300 | 2510        |
| Broken lime            | 2510 | 2705        |
| Shale and lime         | 2705 | 2820        |
| Broken lime            | 2820 | 2845        |
| Lime                   | 2845 | 3145        |
| Broken lime            | 3145 | 3195        |
| Lime                   | 3195 | 3225        |
| Broken lime            | 3225 | 3295        |
| Line and chert         | 3295 | 3325        |
| Lime                   | 3325 | 3395        |
| Broken lime            | 3395 | 3455        |
| Shale                  | 3455 | 3505        |
| Lime crumble           | 3505 | 3555        |
| Lime                   | 3555 | 3705        |
| Lime                   | 3705 | 3750        |
| <b>TOTAL DEPTH</b>     |      | <b>3750</b> |


CASING RECORD

6-5/8" O. D. Surface casing set at 267' and cemented with 150 sacks of cement.

5-1/2" O. D. casing set at 2481' and cemented with 115 sacks of cement.

STATE OF KANSAS )  
 )  
 COUNTY OF WAGONER )

11 4 210  
 60 26

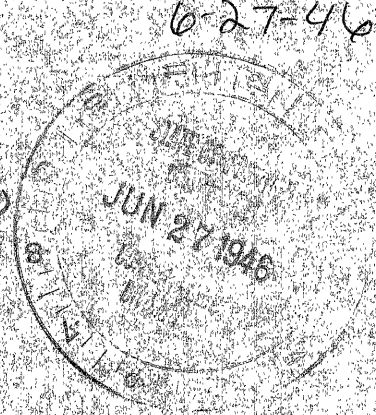

I hereby affirm that the above and foregoing is a true and correct copy of the log of the D. H. Hewitt well #1, located in the South Half of the Southeast Quarter of the Southeast Quarter of Section 11, Township 4 South, Range 21 West, Worton County, Kansas.

HELMERICH & PAYNE, INC.  
 by William F. Payne  
 President

Subscribed and sworn to before me, a Notary Public, this 6th day of August, 1941.

Lee Stullin  
 Notary Public

My commission expires July 22, 1945.