


15-147-00454-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

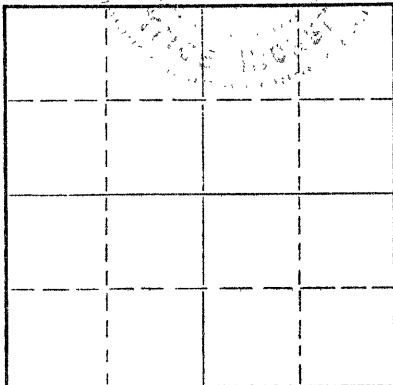

Phillips County. Sec. 35 Twp. 4 Rge. 20 (E) (W) X
Location as "NE/CNW/SW" or footage from lines SW NW SE
Lease Owner Midwestern Supply Co., Inc.
Lease Name McConnell Well No. 1
Office Address Box 825 Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ 7-22-70 19____
Plugging completed _____ 7-29-70 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>5 1/2</u>		<u>282.40</u>
		RECEIVED STATE CORPORATION COMMISSION AUG 6 1970 CONSERVATION DIVISION Wichita, Kansas				
				<u>8-6-70</u>		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved to location. Cleaned out cellar.
Dumped 15 gallons of kerosene down 5 1/2" to soften a paraffin bridge. Pumped hot water down the casing to remove the bridge. Pushed a plug to 3300'. Dumped 25 feet of sand and 5 sacks of cement. Rigged up. Worked pipe to 16 inches on 125,000 lbs. Shot pipe at 2820'.
Worked pipe. Shot pipe at 2770'. Tried spot oil but couldn't break down at 800 psi. Shot pipe at 2742 feet and spotted 70 BO behind the pipe.
Worked pipe and gained 2" tension to 18".
Worked the pipe loose and pulled 30 joints of casing.
Finished pulling a total of 86 joints of casing. Tallied pipe.
Loaded trailer, tore rig down and moved off location.
Squeezed well with 25 sacks of gel, 5 sacks of hulls and 125 sacks of pozmix cement.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed, and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas 67530
(Address)

Subscribed and sworn to before me this 5 day of August, 19 70



My commission expires May 27, 1973

Alice Mickel
Notary Public.

COPY

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

35-4-20W


2010

Company - Fair-Thompson Inc.
Farm - MC CONNELL No. 1

Sec. 35 T. 4 R. 20N
SW NW SE

15-147-00454-00-00

County Phillips
KANSAS



Total Depth, 3719
Comm. 5-6-64

Comp. 9-26-64

Shot or Treatment

Contractor, Leban Drilling Inc.

Logged, 10-31-64

8 5/8" @ 242' w/175 AP

5 7/8" @ 3419'

5 1/2" @ 3419'

1921 KB

35 BOYD NW

Fluores Indicate Bottom of Formations

SAND	50
Blue Shale	242
Shale & Shells	610
Shale & Sand	1000
Sand	1165
Shale	1250
Redbed & Shale	1435
Anhydrite	1462
Shale & Shells	1520
Shale w/Lime Strips	1850
Lime & Shale	3065
Lime	3361
Arbuckle	3362
Lime	3407
Lime & Chert	3445
Lime	3419

TOTAL DEPTH

2075

WICHITA	3023
WICHITA	3048
LANSING	3069
BASE KANSAS CITY	3277
Arbuckle	3355
Pre-Examination	3712

Prof - 3102-06 3118-22
Cement -
Jerry Longen 175 SLS

RECEIVED
STATE CORPORATION COMMISSION
AUG 13 1970
CONSERVATION DIVISION
Wichita, Kansas

8-13-70