

STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 130 S. Market, Room 2078  
 Wichita, KS 67202

WELL PLUGGING RECORD  
 K.A.R.-62-3-117

API NUMBER 15 185-23,257-00-00

LEASE NAME McGinty

WELL NUMBER 2

2310 Ft. from S Section Line

3050 Ft. from E Section Line

SEC. 36 TWP. 21S RGE. 14W (X) or (W)

COUNTY Stafford

Date Well Completed 8/19/04

Plugging Commenced 6:15PM 8/19/04

Plugging Completed 10:45PM 8/19/04

TYPE OR PRINT  
 NOTICE: Fill out completely  
 and return to Coas. Div.  
 office within 30 days.

LEASE OPERATOR CORAL PRODUCTION CORPORATION

ADDRESS 1600 Stout Street, Suite 1500 Denver, CO 80202

PHONE (303) 623-3573 OPERATORS LICENSE NO. 32639

Character of Well D & A

(Oil, Gas, D&A, SMD, Input, Water Supply Well)

The plugging proposal was approved on 8/19/04 (date)

by Steve Durrant (XCC District Agent's Name).

Is ACO-1 filed? Yes If not, is well log attached? \_\_\_\_\_

Producing Formation None Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 3773

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
		Surface	356	8 5/8	356.33	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plug were used, state the character of same and depth placed, from feet to feet each set:  
 1st Plug @ 3700' W/50sks 10sks In Mouse Hole Circulated 1st Plug 15 Minutes W/54 Vis Mud  
 2nd Plug @ 870' W/50sks 15sks In Rat Hole Plugs displaced with mud  
 3rd Plug @ 360' W/50sks Total 185sks 60/40 Poz 6% Gel W/#CF/sk By Allied Cementing  
 4th Plug @ 40' W/10sks Completed @ 10:45PM 8/19/04

Name of Plugging Contractor Discovery Drilling Co., Inc. License No. 31548

Address P.O. Box 763 Hays, KS 67601

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: CORAL PRODUCTION CORPORATION

STATE OF Colorado COUNTY OF Denver, ss.

James R. Weber (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained and the log of the above-described well as filed the the same are true and correct, so help me God.

(Signature) James R. Weber


(Address) 1600 Stout St. #1500, Denver, Co. 80202

RECEIVED

OCT 14 2004 SUBSCRIBED AND SWORN TO before me this 11th day of October, 192004

KCC WICHITA

My Commission Expires: 2/1/2005

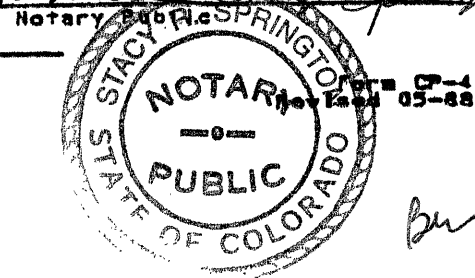

*bu*