

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-025-20781-00-01

Spot: W2NWSW

Sec/Twnshp/Rge: 21-34S-21W

1980 feet from S Section Line, 4620 feet from E Section Line

Lease Name: BARBY A

Well #: 8-21

County: CLARK

Total Vertical Depth: 5609 feet

Operator License No.: 5055

Op Name: C. H. TODD, INC.

Address: 1000 N. TYLER  
WICHITA, KS 67212

CIBP Size: feet: 5415

COND Size: 20 feet: 126 475 SX CMT

II Size: 8.625 feet: 859 WITH 450 SX CMT

PROD Size: 4.5 feet: 5598 WITH 400 SX CMT

SURF Size: 13.38 feet: 223 WITH 150 SX CMT

\$182.29

Well Type: GAS

UIC Docket No:

Date/Time to Plug: 10/01/2004 9:45 AM

Plug Co. License No.: 31151

Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.

Proposal Revd. from: DON HORTON

Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 20 SX CMT & 300# HULLS. PLUG AT 900' WITH 50 SX CMT. PLUG AT 400' WITH 30 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 10/01/2004 1:30 PM

KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

PBTD 5415'. PUMP 20 SX CMT & 300# HULLS OVER PERFS. 1ST PLUG PLUG LOAD HOLE WITH MUD. SPOT 50 SX CMT @ 900'. 2ND PLUG PULL TO 400' & SPOT 30 SX CMT. 3RD PLUG PULL TO 40' WITH 15 SX CMT. STAYED FULL.

Perfs:


Top	Bot	Thru	Comments
5452	5456		
5422	5425		
5404	5407		
5396	5399		

RECEIVED  
OCT 18 2004  
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 3811' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

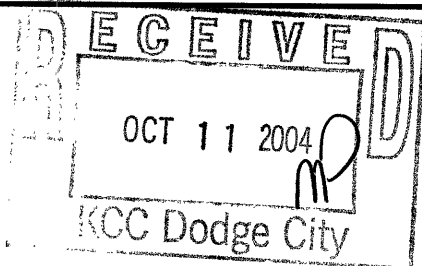

Signed

*[Signature]*  
(TECHNICIAN)

INVOICE

DATE 10-18-04

INV. NO. 2005060669

Form CP-20