

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-30211-00-01
Spot: NESE Sec/Twnshp/Rge: 8-30S-15W
1980 feet from S Section Line, 760 feet from E Section Line
Lease Name: L M LEE B Well #: 1
County: BARBER Total Vertical Depth: 4728 feet

Operator License No.: 101
Op Name: KCC FEE FUND PLUG
Address: 130 S. MARKET
WICHITA, KS 67202

PROD Size: 4.5 feet: 4726
SURF Size: 8.625 feet: 310

Well Type: EOR UIC Docket No: E15203.1 Date/Time to Plug: 10/01/2004 1:30 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: RICHARD LACEY Company: KANSAS CORPORATION COMMIS Phone: (620) 225-8888

Proposed Plugging Method: SAND BOTTOM TO 4590' & 4 SX CMT. FREPOINT PIPE & PULL TO 850'. PUMP 10 SX GEL & 50 SX CMT. PULL CASING TO 330' & SPOT 50 SX CMT. PULL CASING TO 40' & SPOT 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/01/2004 2:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4590' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 850' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 330' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4646	4676		

RECEIVED
OCT 18 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 3520' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

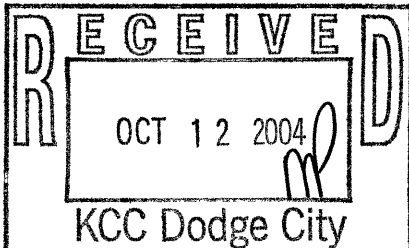

Signed

Stephen J. Pfeifer
(TECHNICIAN)