


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

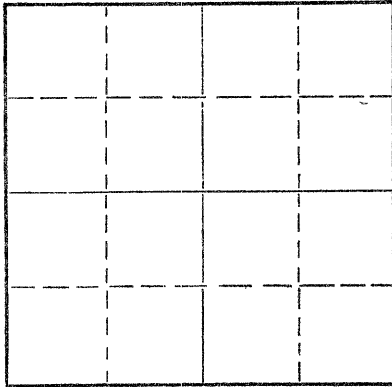

Locate well correctly on above
Section Plat

Phillips County, Sec. 19 Twp. 4 Rge. 19 (E) (W) x
Location as "NE/CNW/SW" or footage from lines NE NW NE
Lease Owner Petroleum Management Inc.
Lease Name White Well No. #1
Office Address 1515 Wichita Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 5-3-69 19
Plugging completed 5-12-69 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3400' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3399'	2274.13'
				8 5/8"	222'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3180'. Mixed and ran sacks cement thru dump bailer.
Squeezed hole with 24 sacks gel - 2 sacks hulls and 140 sacks cement - 50-50 pozmix with 6% gel.

RECEIVED
STATE CORPORATION COMMISSION
MAY 15 1969
05-15-1969
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND sworn to before me this 14 day of MAY, 1969

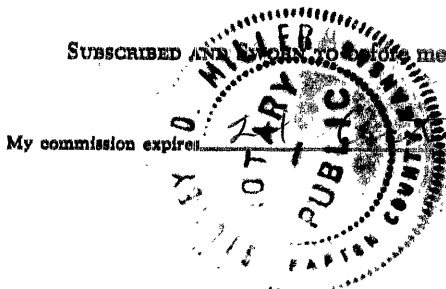

Sidney D. Miller
Notary Public.

My commission expires

15-147-20068-00-00

DRILLERS LOG

No. 1 White

CASING RECORD:	COMPANY:	Petroleum Management, Inc.	DESCRIPTION:
8 5/8" @ 222.41'	CONTRACTOR:	Red Tiger Drilling Co.	NE NW NE
w/145 sx cement	COMMENCED:	March 4, 1969	19-4S-19W
4 1/2" @ 3399'	COMPLETED:	March 10, 1969	Phillips County,
w/225 sx cement			Kansas
TOTAL DEPTH:			ELEVATION:
3400'			

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay, Shale	0	230	
Shale	230	1115	
Sand	1115	1260	
Shale	1260	1516	
Anhydrite	1516	1552	
Shale	1552	1650	
Shale, Lime	1650	3150	
Lime	3150	3400	

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1969
OIL-24-1969
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Norman E. Klein
Norman E. Klein

Subscribed and sworn to before me this 12th day of March, 1969.

Gloria Sawcett
Notary Public

My Commission Expires:

10-25-72