

15-137-20077-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

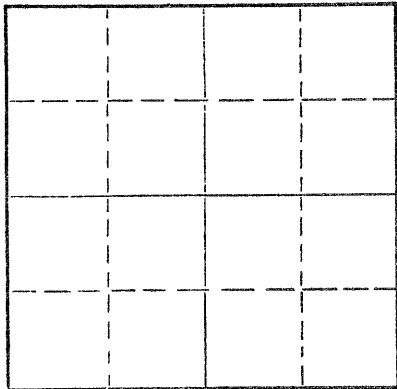

Locate well correctly on above
Section Plat

Norton County. Sec. 28 Twp. 4S Rge. (E) 22 (W)
Location as "NE/CNWxSWx" or footage from lines C SW SW
Lease Owner Leben Oil Corporation
Lease Name Finley Well No. #1
Office Address 200 West Douglas Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 5, 19 71
Application for plugging filed August 5, 19 71
Application for plugging approved August 5, 19 71
Plugging commenced August 5, 19 71
Plugging completed August 5, 19 71
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3780' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	209'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with 100 sacks 50/50 Pozmix 6% gel @ 1050'
Plugged with 25 sacks 50/50 Pozmix 6% gel @ 220'
Plugged with 1/2 sack Hulls - 10 sacks cement @ 40'

RECEIVED
STATE CORPORATION COMMISSION
AUG 12 1971
CONSERVATION DIVISION
Wichita, Kansas

8-12-71

Name of Plugging Contractor Leben Drilling, Inc.
Address 100 Park Ave. Bldg. Oklahoma City, Oklahoma 73102

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

(Address)


SUBSCRIBED AND SWORN TO before me this 10 day of Aug, 19 71

My commission expires 4-29-75
Jacobi Perry Notary Public.

WELL LOG 15-137-20077-00-00

Company Leben Oil Corporation
Contractor Leben Drilling, Inc.
Farm Finley #1
Total Depth 3780'
Commenced July 30, 1971
Completed August 5, 1971

Sec. 28 T. 4S R. 22W
Loc. C SW SW
County Norton
Casing 8 5/8"
Production



Figures Indicate Bottom of Formations

0' - 67' surface clay & sand
67' - 150' shale & sand
150' - 209' blue shale
209' - 1140' shale
1140' - 1630' sand & shale
1630' - 1891' shale & red bed
1891' - 1922' anhy.
1922' - 2190' shale
2190' - 2670' shale & lime
2670' - 3440' lime & shale
3440' - 3780' lime

RECEIVED
STATE CORPORATION COMMISSION
AUG 12 1971
CONSERVATION DIVISION
Wichita, Kansas

8-12-71

State of Oklahoma
County of Oklahoma } SS

I, Leslie Kite of Leben Drilling, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Finley #1 Well.

Leslie Kite

Subscribed and sworn to before me this 10 day of Aug., 1970

My Commission Expires: 4-29-75

Jackie Riley