

15-039-00191-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Decatur County. Sec. 17 Twp. 4S Rge 29 (E)/(W)

Location as "NE/CNW/SW" or footage from lines C SE SE

Lease Owner D. R. Lauck Oil Co., Inc.

Lease Name Young Well No. 1

Office Address 301 South Broadway, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-2 1962

Application for plugging filed 12-2 1962

Application for plugging approved 12-2 1962


Plugging commenced 12-2 1962

Plugging completed 12-2 1962

Reason for abandonment of well or producing formation No oil or gas found in commercial quantities

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

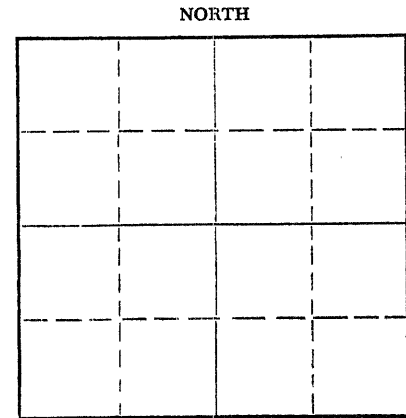

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	237'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole to 550' and set bridge. Cement with 20 sacks through drill pipe. Fill hole to 180' with rotary mud.. Set plug and cement with 20 sacks through drill pipe. Fill hole to 35' with rotary mud to base of cellar and set solid plug and cement with 10 sacks.

RECEIVED
STATE CORPORATION COMMISSION

DEC 10 1962

CONSERVATION DIVISION
Wichita, Kansas

12-10-62

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co.

Address 412 Union Center Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Wilson Rains - Partner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains
Wilson Rains - Partner
412 Union Center- Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of December, 19 62

Sandra Ames
Sandra Ames
Notary Public.

My commission expires August 14, 1966

