


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Decatur County, Sec. 35 Twp. 4S Rge. 27W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
NE NW NE

Lease Owner Dupont Oil Company
Lease Name Spresser #1 Well No. _____
Office Address Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole) _____

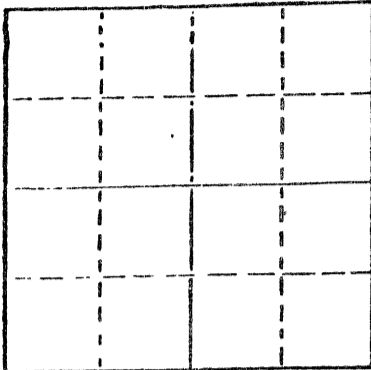

Locate well correctly on above
Section Plot

Date Well completed 19____
Application for plugging filed 19____
Application for plugging approved 19____
Plugging commenced 8/17/78 19____
Plugging completed 8/21/78 19____
Reason for abandonment of well or producing formation
depleted. _____

If a producing well is abandoned, date of last production 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3674
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	351	none
				4 1/2"	3672	1802'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Sanded to 3150' and ran 4 sacks cement. Shot pipe at 2505', 1800', pulled 43 joints.
Squeezed hole with 3 sacks hulls, 70 sacks cement, 14 sacks gel. Released plug and displaced
with 60 sacks cement, 50/50 pozmix, 6% gel.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 21st day of August, 19 78

My commission expires _____



Margaret Melcher
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

AUG 23 1978

8-23-78
CONSERVATION DIVISION
Wichita, Kansas