


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-137-00649-00-00
WELL PLUGGING RECORD

NORTH

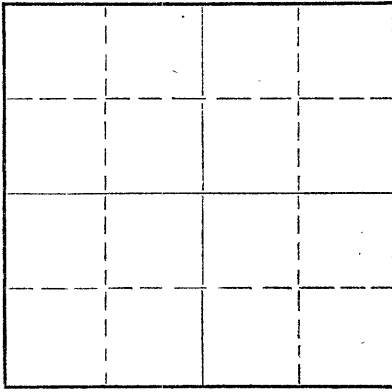

Locate well correctly on above
Section Plat

Norton County. Sec. 2 Twp. 4 Rge. 24 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW/NW/SE
Lease Owner Jones, Shelburne & Farmer
Lease Name Radloff Well No. #1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed yes 19
Application for plugging approved yes 19
Plugging commenced 6-24 1956
Plugging completed 7-2 1956
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3773' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
					shot at	1851'
						1747'
						1653'
						1542'
						1431'
						1340'
						1232'
				loose at	1122'	1124'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured into 3773'
Plugging started 6-24-56. Finished 7-2-56.
Plugged off bottom sand back to 3750' and dumped 4 sacks cement with bailer and shot 5 1/2" casing at 1851'-1747'-1653'-1542'-1431'-1340'-1232'-1124'. Pulled pipe out of hole and plugged well with heavy mud to 250' and set permanent rock bridge. Dumped 15 sacks cement. Filled hole with heavy mud to 35' and mixed 10 sacks for cap on well.

07-10-1956

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J. O. Forbes d/b/a Forbes Casing Pulling Company
Address Box 221, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
221022 - Great Bend (Address)

SUBSCRIBED AND SWORN TO before me this 5 day of July, 1956

My commission expires April 8, 1957

Arthur F. Ziskel Notary Public.

PLUGGING
FILE SEC 2 T4 R. 24W
BOOK PAGE 78 LINE 7