

RECEIVED
OCT 29 2004
KCC WICHITA

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 163-01770-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date _____.

Well Operator: American Warrior Inc. KCC License #: 4058
(Owner / Company Name) (Operator's)

Address: P.O. Box 399 City: Garden City

State: Ks. Zip Code: 67846 Contact Phone: (620) 272 - 1023

Lease: Tucker Well #: 2 Sec. 32 Twp. 9 S. R. 20 East West

C - NW - SE - SW Spot Location / QQQQ County: Rooks

990' Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

3630' Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 85/8 Set at: 201 Cemented with: NA Sacks

Production Casing Size: 51/2 Set at: 3813' Cemented with: NA Sacks

List (ALL) Perforations and Bridgeplug Sets: 3813' to 3818' Open hole.

Elevation: 2243' (G.L. / K.B.) T.D.: 3818' P.B.T.D.: OH Anhydrite Depth: 1748
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Perf 2sp 2225', 1750', 1050', Run tbg to 3698. Pump 100 sx plug pull tbg to 2225 and pump 100sx plug, pull tbg to 1750' Pump 100sx, pull tbg to 1050 pump 100sx, pull tbg and pump 50sx. 350sx 60/40 pos w/ 600# hulls. Cut casing off 6' down, cap and back fill. Herb Deines 10/28/04.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? No Files

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Jody Smith

Phone: (620) 272 - 1023

Address: P.O. Box 399 City / State: Garden City Ks. 67846

Plugging Contractor: Swift Services Inc. KCC License #: 32382
(Company Name) (Contractor's)

Address: P.O.Box 466 Ness City Ks. 67560 Phone: (785) 798 - 2300

Proposed Date and Hour of Plugging (if known?): NA


Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 10/28/04 Authorized Operator / Agent: [Signature]
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

11/04

10/05

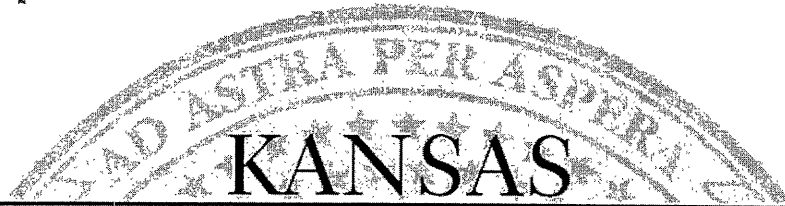

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

American Warrior, Inc.
PO Box 399
Garden City, KS 67846

November 01, 2004

Re: TUCKER #2
API 15-163-01770-00-00
NWSESW 32-9S-20W, 990 FSL 1650 FWL
ROOKS COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #4
2301 E. 13th
Hays, KS 67601
(785) 625-0550

Sincerely


David P. Williams
Production Supervisor