

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
500 INSURANCE BUILDING
212 NORTH MARKET
WICHITA 2, KANSAS

RECEIVED
STATE CORPORATION COMMISSION

DEC 12 1962
12-12-1962
CONSERVATION DIVISION
Wichita, Kansas

WELL PLUGGING APPLICATION FORM
File One Copy

15-039-00190-00-00

Lease Owner EMPIRE DRILLING COMPANY
(Applicant)
Address 650 FOURTH NATIONAL BANK BLDG. WICHITA 2, KANSAS

Lease (Farm Name) SAWYER Well No. 1

Well Location C SW SW Sec. 34 Twp. 4S Rge. 28 ~~(X)~~ XXXXXXX (W)

County Decatur County, Kansas Field Name (If any)

Total Depth 4075 Oil Well Gas Well Input Well SWD Well D & A XXXXXXX

Was well log filed with application? yes If not, explain:

Date and hour plugging is desired to begin December 4, 1962

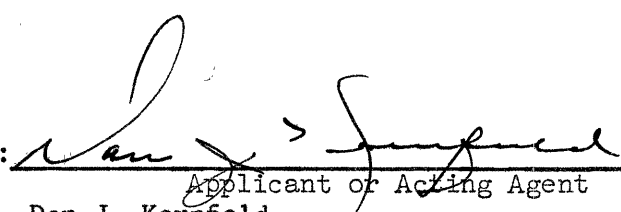
Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission.

Name of the person on the lease in charge of well owner M. C. HELBERG
715 W. McFarland
Address HILL CITY, KANSAS

Plugging Contractor EMPIRE DRILLING COMPANY License No.
Address 650 FOURTH NATIONAL BANK BLDG., WICHITA 2, KANSAS

Invoice covering assessment for plugging this well should be sent to EMPIRE DRILLING COMPANY
Address 650 FOURTH NATIONAL BANK BLDG., WICHITA 2, KANSAS

and payment will be guaranteed by applicant.

Signed: 
Applicant or Acting Agent
Dan J. Kornfeld

Date: December 10, 1962

L O G

COMPANY: Empire Drilling Company
 CONTRACTOR: Empire Drilling Company
 FARM: Sawyer #1
 LOCATION: C SW SW Section 34-4-28W, Decatur County, Kansas

COMMENCED: November 25, 1962 ELEVATION: 2671 KB
 COMPLETED: December 4, 1962 POTENTIAL: D & A

0	to	220	Surface - Sand & Shale
220	to	1755	Shale
1755	to	2181	Shale & Snad
2181	to	2194	Gyp
2194	to	2345	Shale - Red Bed
2345	to	2455	Shale & Gyp
2455	to	2472	Shale & Shells
2472	to	2506	Anhydrite
2506	to	2925	Shale & Shells
2925	to	3055	Shale & Lime
3055	to	3185	Shale & Shells
3185	to	3880	Lime & Shale
3880	to	3920	Lime & Shale & Chert
3920	to	4075	Lime & Shale
4075			Rotary Total Depth

SET: 193' of 8 5/8" with 115 sacks cement.

WELEX ELECTRIC LOG TOPS:

Anhydrite	2472	+199
Heebner	3814	-1143
Toronto	3844	-1173
Lansing	3858	-1187
Base Kansas City	4056	-1385
Log Total Depth	4075	


RECEIVED
 STATE CORPORATION COMMISSION

DEC 12 1962

CONSERVATION DIVISION
 Wichita, Kansas

C E R T I F I C A T I O N

I, Dan J. Kornfeld, do hereby certify that the above and foregoing is a true and correct copy of the log on the Sawyer #1, C SW SW Section 34-4S-28W, Decatur County, Kansas, as reflected by the files of Empire Drilling Company.


 Dan J. Kornfeld

Subscribed and sworn to before me, a Notary Public, within and for Sedgwick County, Kansas, this 10th day of December, 1962.


 Lucille H. Harr, Notary Public

My commission expires October 21, 1966.



JOHN ANDERSON, Jr. Governor
RICHARD C. BYRD Chairman
ALVIN F. GRAUERHOLZ Commissioner
HARRY G. WILES Commissioner
RAYMOND B. HARVEY Secretary
CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS

15-039-00190-00-00

December 4, 1962

WELL PLUGGING AUTHORITY

Well No. 1
Lease Sawyer
Description C SW SW 34-4-28W
County Decatur

Empire Drilling Co.
650 4th Nat'l Bk. Bldg.
Wichita, Kansas

Gentlemen:

This is your authority to plug the above subject well in accordance with the Rules and Regulations of the State Corporation Commission.

This authority is void after 90 days from the above date.

Very truly yours,



J. P. ROBERTS
Assistant Petroleum Conservation
Director

Mr. Eldon Petty Box 326 Hays, Kansas
is hereby assigned to supervise the plugging of the above
named well.

