


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Decatur County. Sec. 4 Twp. 4 Rge. 28 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

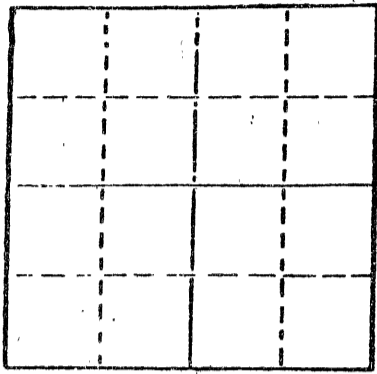

Locate well correctly on above Section Plat

SE SE NE  
Lease Owner Halliburton Oil Producing Co.  
Lease Name Vavroch #1 Well No.  
Office Address Stafford, Kansas  
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 9/25/79 19  
Plugging completed 10/15/79 19  
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Balthazor  
Producing formation Depth to top Bottom Total Depth of Well 3950  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	217	none
				5 $\frac{1}{2}$ "	3949	1627'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped bottom with 50 sacks cement, 3% cc. Shot pipe at 3187', 2998', 2570', 2480', 2152', 1835', 1615', pulled 50 joints. Pumped 3 sacks hulls, 21 sacks gel, 70 sacks cement, released 8-5/8 plug and pumped 60 sacks cement, 50-50 poz, 6%.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS

SUBSCRIBED AND SWORN TO before me this 19th day of October, 1979

Margaret Melcher Notary Public.

My commission expires



RECEIVED  
STATE CORPORATION COMMISSION  
10-22-1979  
OCT 22 1979

CONSERVATION DIVISION  
Wichita, Kansas