

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-159-22435-00-00
Spot: SWSW Sec/Twnshp/Rge: 29-18S-9W
500 feet from S Section Line, 700 feet from W Section Line
Lease Name: WHARTON TRUST Well #: 1-29
County: RICE Total Vertical Depth: 3350 feet

Operator License No.: 3842
Op Name: LARSON ENGINEERING INC DBA LARS
Address: 562 WEST HIGHWAY 4
OLMITZ, KS 67564

SURF Size: 8.625 feet: 301

RECEIVED
KCC DISTRICT #2
OCT 26 2004
WICHITA, KS
\$108.88

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 10/26/2004 12:00 AM
Plug Co. License No.: 30141 Plug Co. Name: SUMMIT DRILLING COMPANY
Proposal Rcvd. from: DAN Company: SUMMIT DRILLING COMPANY Phone: (620) 343-3278

Proposed 35 sxs @ 3260'
Plugging 35 sxs @ 1150'
Method: 35 sxs @ 925'
25 sxs @ 60'
35 sxs @ 350'

Plugging Proposal Received By: VIRGIL CLOTHIER WitnessType: NONE
Date/Time Plugging Completed: 10/26/2004 6:50 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

Perfs:

The drill pipe ran to top of Arbuckle at 3260' where 35 sacks of cement were spotted. Pulled drill pipe to 1150' and spotted 35 sacks of cement. Pulled drill pipe to 925' and spotted 35 sacks of cement. Pulled drill pipe to 350' and spotted 35 sacks of cement. Pulled drill pipe to 60' and spotted 25 sacks of cement.

60/40 posmix with 4% gel

Allied Cement #20097


RECEIVED
OCT 29 2004
KCC WICHITA

Remarks:

Plugged through: DP

District: 02

Signed _____

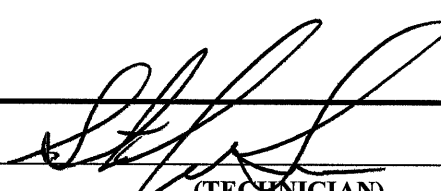

(TECHNICIAN)

INVOICED

DATE 10-29-04

NO. 8005060728