

CARD MUST BE TYPED

State of Kansas

CARD MUST BE SIGNED

EFFECTIVE DATE 11-22-04

NOTICE OF INTENTION TO DRILL HUGOTON INFILL

507-yes

Starting Date 11/20/04
month day year

API Number 15 - 175-21955.00-00
APPROX

OPERATOR: License # 8061
Name Oil Producers, Inc. of Kansas
Address P.O. Box 8647
City/State/Zip Wichita, Ks. 67208
Contact Person Diana Richecky
Phone 316-681-0231

2 IS SECTION X REGULAR IRREGULAR
205/25/2N/2 SE. Sec. 33 Twp. 32 S. Rg. 33 W
1520 Ft. from South Line of Section
1320 Ft. from East Line of Section

CONTRACTOR: License # 33375
Name Cheyenne Drilling Co., Inc.
City/State Garden City, Ks.
Well Drilled as: X New Recompletion OWWO
Projected Total Depth Winfield feet
Formation Winfield

NOTE: Attach acreage attribution plat locating both Chase (Hugoton) wells
Total number of acres attributed to unit 640
Nearest producing well from 2710' Per Plat feet
same common source of supply 1320 feet
Nearest lease or unit boundary line 1320 feet
County Seward
Lease Name Hanson Well # 33
Ground surface elevation EST. 2303 feet MSL
Depth to bottom of fresh water 500
Depth to bottom of usable water 510
Surface pipe by Alternate: 1 X 2
Surface pipe planned to be set 530
Water Source for Drilled Operations:
DWR Permit #: well farm pond other

If OWWO or Recompletion: old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth


I certify that well will comply with K.S.A. 55-101, et seq., plus eventually plugging hole to KCC specifications.
Date 11/8/04 Signature of Operator or Agent T. M. May Title VICE PRESIDENT

For KCC Use:
Conductor Pipe Required NONE feet; Minimum Surface Pipe Required 530 feet per Alt 1
This Authorization Expires 5-17-05 Approved By R. JO 11-17-04

9/95

Must be filed with K.C.C. five (5) days prior to commencing well
This card void if drilling not started within six (6) months of date received by K.C.C.

A Regular Section of Land
1 Mile = 5,280 Ft.

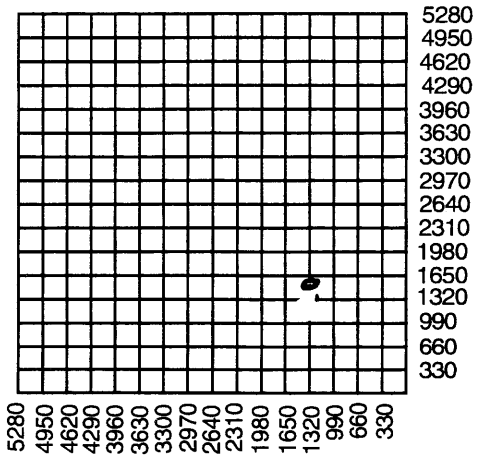

- Important procedures to follow:
1. Notify District office before setting surface casing.
 2. Set surface casing by circulating cement to the top.
 3. File completion forms ACO-1 with K.C.C. within 120 days of well spud date, following instructions on ACO-1, side 1, and including copies of wireline logs.
 4. Notify District office 48 hours prior to old well workover or re-entry.
 5. Submit plugging report (CP-4) to K.C.C. after plugging is completed.
 6. If an alternate 2 completion, cement in the production pipe from below any useable water to surface within 120 days of spud date.

RECEIVED
KANSAS CORPORATION COMMISSION

NOV 09 2004

CONSERVATION DIVISION
WICHITA, KS

State Corporation Commission of Kansas
Conservation Division
130 S. Market Room 2078
Wichita, Kansas 67202-1212
(316) 337-6231

KANSAS

CORPORATION COMMISSION

KATHLEEN SEBELIUS, GOVERNOR
BRIAN J. MOLINE, CHAIR
ROBERT E. KREHBIEL, COMMISSIONER
MICHAEL C. MOFFET, COMMISSIONER

November 16, 2004

Ms. Diana Richecky
Oil Producers, Inc. of Kansas
PO Box 8647
Wichita, KS 67208

RE: Drilling Pit Application
Hanson Lease Well No. 2-33
SE/4 Sec. 33-32S-33W
Seward County, Kansas

Dear Ms. Richecky:

District staff has inspected the above referenced location and has determined that the reserve pit shall be constructed **without slots**, the bottom shall be flat and reasonably level, and the free fluids must be removed. The fluids are to be removed from the reserve pit as soon as the Hutchinson Salt section has been drilled through and displacement of the fluids into the reserve pit has occurred. The fluids should be removed again as soon as practical after drilling operations have ceased.


If production casing is set all completion fluids shall be removed on a daily basis.

The fluids should be taken to an authorized disposal well. Please call the District Office at (620) 225-8888 when the fluids have been removed. Also please file the enclosed CDP-5 form, Surface Pond Waste Transfer, within 30 days of fluid removal.

A copy of this letter should be posted in the doghouse along with the approved Intent to Drill.

If you have any questions or concerns please feel free to contact the undersigned at the above address.

Sincerely,


Kathy Haynes

Environmental Protection and Remediation Department

cc: S Durrant