


15-147-00159-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

WELL PLUGGING RECORD

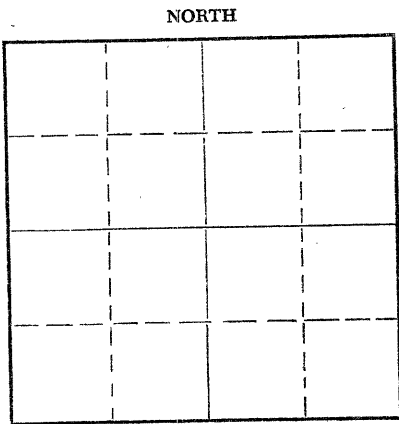

Locate well correctly on above  
Section Plat

Phillips County. Sec. 29 Twp. 5S Rge. 18W (X) (W)  
Location as "NE/CNW/SW" or footage from lines C SW SW NW  
Lease Owner Cities Service Petroleum Company  
Lease Name Higby Well No. 1  
Office Address Box 553, Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 3/13-1962  
Application for plugging filed 3/13-1962  
Application for plugging approved 3/14-1962  
Plugging commenced 3/14-1962  
Plugging completed 3/14-1962  
Reason for abandonment of well or producing formation Non Commercial

If a producing well is abandoned, date of last production --- 19 ---  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3670 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	240'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged well by Howco thru drill pipe as follows:  
Filled hole w/heavy rotary mud to 540' thru drill pipe;  
Spotted 20 sx. cement thru drill pipe at 540';  
Filled hole w/heavy mud to 180' thru drill pipe;  
Set Howco wooden plug w/sack cottonseed hulls @ 180';  
Spotted 20 sx. of cement thru drill pipe on plug @ 180';  
Filled hole w/heavy mud thru drill pipe to 40';  
Set Howco wooden plug with one sack cottonseed hulls @ 40';  
Filled hole from 40' to base of cellar w/10 sx. cement;  
Job complete 8:15 P.M. 3/14/62.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 13 1962  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

4-16-62

Name of Plugging Contractor Peel Bros. Inc.  
Address Holsington, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
M. M. Hardin (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. M. Hardin  
M. M. Hardin - District Superintendent  
Box 553, Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 2nd day of April, 1962

My commission expires March 12, 1963

W. J. Smith  
Notary Public.



# WELL RECORD

WILDCAT.....

DISCOVERY.....

POOL.....

COMPANY Cities Service Petroleum Co. WELL # 1 FARM Highy

LOCATION 330' North and 330' East of W/4 Corner

Section 29, Township 5, Range 18 West

ELEV. 2030 K.B., 2028 D.F., 2023 Gr. CO. Phillips STATE Kansas

IP. Dry hole. P. and A. March 14, 1962.

PERFS.....

FRAC..... ACID None

T.D. 3670' PBTD..... GRAV/GOR.....

DRLG. COMM. March 3, 1962 COMP. March 14, 1962 CONTRACTOR Peel Bros., Inc.

### CASING RECORD:

8-5/8" at 239' with 250 sacks cement.

### FORMATION RECORD:

soil and shale	0-239
shale and shells	675
sand and streaks shale	785
shale	895
sand	980
shale	1115
sand	1210
shale and red bed	1345
shale and shells	1597
Anhydrite	1640
shale and shells	1905
shale and lime	2130
lime and shale	2200
lime	2955
lime and shale streaks	3055
lime	3580
lime and chert	3665
chert	3670 T.D.

Slope Tests (Syfo):

500'	- 1/4"
1000'	- 1/4"
1500'	- 1/4"
2000'	- 1/4"
2500'	- 1/4"

**RECEIVED**  
STATE CORPORATION COMMISSION

APR 13 1962

CONSERVATION DIVISION  
Wichita, Kansas

4-16-62