

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-187-20388-00-00
Spot: NE Sec/Twnshp/Rge: 35-30S-41W
3960 feet from S Section Line, 1320 feet from E Section Line
Lease Name: JULIUS JOHNS Well #: 1-35
County: STANTON Total Vertical Depth: 5740 feet

Operator License No.: 5363
Op Name: BEREXCO, INC.
Address: PO BOX 20380
WICHITA, KS 67208

CIBP Size: feet: 5340 WITH 2 SX CMT
PROD Size: 5.5 feet: 5739 WITH 200 SX CMT
SURF Size: 8.625 feet: 1500 WITH 750 SX CMT

Well Type: OIL UIC Docket No: Date/Time to Plug: 11/10/2004 1:00 PM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE
Proposal Rcvd. from: GREG KLAUS Company: BEREXCO Phone: (316) 772-8650

Proposed Plugging Method: CIBP @ 5340' WITH 2 SX CMT. PLUG AT 1500' WITH 15 SX GEL & 50 SX CMT. PLUG AT 500' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT

Plugging Proposal Received By: STEVE MIDDLETON WitnessType: PARTIAL
Date/Time Plugging Completed: 11/12/2004 10:00 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PBTD 5630'. CIBP @ 5340' WITH 2 SX CMT. 1ST PLUG AT 1540' WITH 50 SX CMT.
2ND PLUG AT 550' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
5671	5676		
5467	5474		
5387	5400		

RECEIVED
NOV 15 2004
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY EAGLE WELL SERVICE. RECOVERED 1840' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

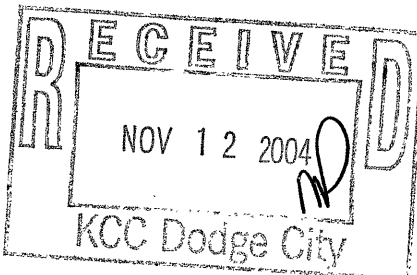

Signed

Ken Jehlik
(TECHNICIAN)

INVOICED
DATE 11-15-04
INV. NO. 2005060811

[Signature]
Eagle Well Service