

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-167-21132-00-00 <sup>KCC</sup> <sup>apb</sup> <sup>11-17-04</sup>  
Spot: NWNE Sec/Twnshp/Rge: 10-14S-11W  
610 feet from N Section Line, 1830 feet from E Section Line  
Lease Name: DOUBRAVA Well #: 1  
County: RUSSELL Total Vertical Depth: 300 feet

Operator License No.: 101  
Op Name: KCC FEE FUND PLUG  
Address: 130 S. MARKET  
WICHITA, KS 67202

SURF Size: 8.625 feet: 239

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/26/2003 1:00 PM  
Plug Co. License No.: 3152 Plug Co. Name: POE SERVICING INC  
Proposal Rcvd. from: DISTRICT #4 STAFF Company: KCC-HAYS, KANSAS Phone: (785) 625-0550

Proposed Drilling by Custom Oil Exploration in December 1977.  
Plugging Reported as D&A but no plugging report. - Report Found 11-17-04 KCC apb  
Method: Original well reportedly drilled to 3060'. 11-17-04

Plugging Proposal Received By: HERB DEINES WitnessType: PARTIAL  
Date/Time Plugging Completed: 08/26/2003 3:00 PM KCC Agent: HERB DEINES

Actual Plugging Report:

Rigged up pulling unit and ran tubing to 300' where solid bridge was found.  
Determined bridge to be cement.  
Circulated cement from 300' to surface with 87 sxs cement.  
Pulled tubing with hole full of cement.  
Cut off casing and restored site.

Perfs:


RECEIVED  
NOV 16 2004  
KCC WICHITA

Remarks: ALLIED CEMENTING COMPANY

Plugged through: TBG

District: 04

Signed \_\_\_\_\_

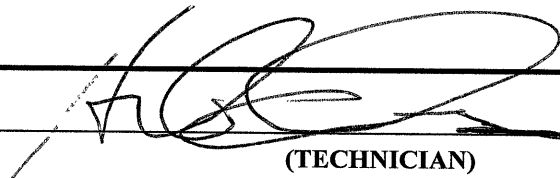

(TECHNICIAN)

NOV 12 2004

CUSTOM OIL EXPLORATION  
BOX 305, CHASE, KS.

#1 DOUBRAVA


10-14-11W  
50' N & 150' E,  
C-NW-NE

CONTR EMPHASIS OIL OPERATIONS, CTY RUSSELL

GEOL WAYNE LEBSACK FIELD WC (1-3/4 NW OF WILSON CRK)

E 1773 KB CM 12/19/77 CARD ISSUED 2/9/78 IP D&A/LANS  
12/29/77

API 15-167-21,132



LOG	TOPS	DEPTH	DATUM
HER	1415	+358	
BRNVILLE	2160	-387	
TARK	2282	-509	
HOW	2489	-716	
TOP	2567	-794	
HEEB	2811	-1038	
BRIM	2905	-1132	
LANS	2923	-1150	
TD	3060	-1287	

8-5/8" 239  
DST (1) 2298-2340/10-20-60-60, 200'  
MSW, SJP 814-814#, FP 83-83#  
94-141#

*Handwritten notes and signatures, including a large '177' and other illegible scribbles.*

INDEPENDENT OIL & GAS SERVICE  
WICHITA, KANSAS