

15-147-20131-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

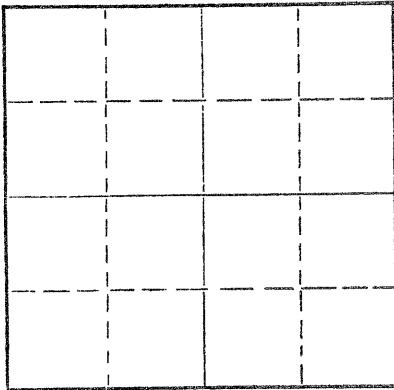

Locate well correctly on above
Section Plat

Phillips County. Sec. 30 Twp. 5S Rge. (E) 19 (W)
Location as "NE/CNW/SW" or footage from lines. C SE SW
Lease Owner Leben Oil Corporation
Lease Name Hamit Well No. #1
Office Address 200 West Douglas Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 14, 19 71
Application for plugging filed August 14, 19 71
Application for plugging approved August 14, 19 71
Plugging commenced August 14, 19 71
Plugging completed August 14, 19 71
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3680 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	209'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 720' w/70 sx 50-50 Posmix 6% gel.
Plug @ 210' w/20 sx
Plug @ 40' w/ 1/2 sx hulls & 10 sx

RECEIVED
STATE CORPORATION COMMISSION
08-20-1971
AUG 20 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Leben Drilling, Inc.
Address 100 Park Ave. Building Oklahoma City, Oklahoma 73102

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

(Address) _____

SUBSCRIBED AND SWORN TO before me this 18th day of August, 19 71

My commission expires 7-26-72

Notary Public.

WELL LOG

15-147-20131-00-00

Company Leben Oil Corporation

Sec. 30 T. 5S R. 19W

Contractor Leben Drilling, Inc.

Loc. C SE SW

Farm Hamit #1

County Phillips


Total Depth 3680'

Casing 8 5/8"

Commenced August 8, 1971

Production

Completed August 14, 1971



Figures Indicate Bottom of Formations

0' - 21' surface soil & sand
 21' - 40' post rock
 40' - 67' sand
 67' - 420' shale
 420' - 1100' shale & red bed
 1100' - 1430' sand & shale
 1430' - 1713' red bed & shale
 1713' - 1744' anhy
 1744' - 2170' shale
 2170' - 2525' shale & lime
 2525' - 3365' lime & shale
 3365' - 3680' lime

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 20 1971
 CONSERVATION DIVISION
 Wichita, Kansas

State of Oklahoma }
 County of Oklahoma } SS

I, Leslie Kite of Leben Drilling, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Hamit #1 Well.

Leslie Kite

Subscribed and sworn to before me this 18th day of August, 1971

My Commission Expires: 7-26-72 W. O. Galt