


15-147-00944-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

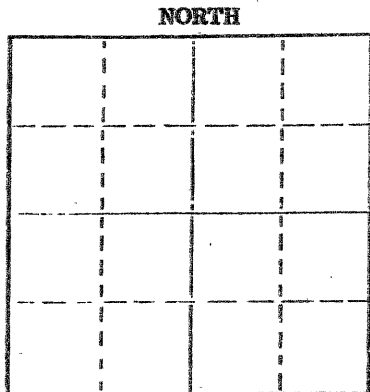

Phillips County. Sec 2 Twp. 5 Rge. 20 (E) (W) X
Location as "NE/CNW/SW" or footage from lines NW NW SW
Lease Owner Bankoff Oil Co.
Lease Name Hill "A" Well No. #2
Office Address P.O. Drawer 2479, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 10-3-75 19
Application for plugging approved 19
Plugging commenced 10-6-75 19
Plugging completed 10-15-75 19
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3432' F--
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Includes handwritten date 'OCT 17 1975' and 'CONSERVATION DIVISION' stamp.

10-1-75

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3125'. Mixed and ran 4 sacks cement thru dump bailer.
Squeezed hole with 3 sacks hulls - 20 sacks gel - 70 sacks cement and 10 sacks gel. Released plug and displaced with 50 sacks cement.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas (Address)

Subscribed and Sworn to before me this 16 day of October 19 75

My commission expires 24 October 1976
Sidney D. Mill Notary Public



DRILLERS' LOG

Company: White Eagle Oil Company

NW NW SW
Sec. 2, Twp. 55, Rge. 20W,

Farm Name: Hill "A" Well No. 2

County: Phillips,
Kansas

Total Depth: 3426'

Elevation:

Comm: 8/19/57 Comp: 8/26/57
Contractor: Peel Brothers, Inc.

Productions:

Casing: 8 5/8" @ 232' con.
5 1/2" @ 3425' con.

Figures below indicate bottoms of formations:

Clay and shale	0 -	232
Shale and shells		675
Shale and sand streaks		830
Sand and shale		1070
Sand		1250
Shale		1530
Anhydrite		1562
Red bed and shale		1730
Shale		2070
Shale and lime		3010
Lime		3310
Lime and shale		3426
Total Depth		3426

This is to certify that the above information is to the best of our knowledge, true and correct.

PEEL BROTHERS, INC.

Merrell G. Peeg
BY: _____

SUBSCRIBED AND SWORE to before me this 30th day of August, 1957

My commission expires: April 27, 1960

Ruth Brant

Notary Public

RECEIVED
STATE CORPORATION COMMISSION

OCT 6 1957

10-6-57

CONSERVATION DIVISION
Wichita, Kansas