


15-147-00455-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

Phillips County, Sec. 2 Twp. 5 Rge. 20 (E) (W) X
Location as "NE/CNWSW" or footage from lines SW SW NW
Bankoff Oil Co.

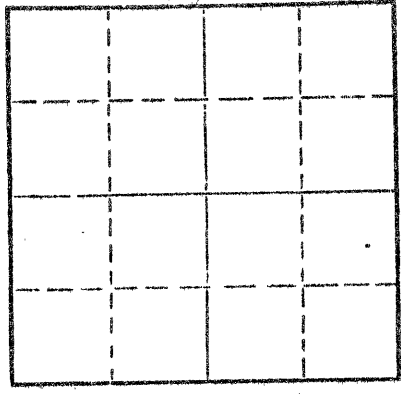

Locate well correctly on above
Section Plat

Lease Owner: Hill
Lease Name: Hill Well No. B #1
Office Address: 1119 Sherman Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed: 19
Application for plugging filed: 19
Application for plugging approved: 19
Plugging commenced: 9-22-73 19
Plugging completed: 10-5-73 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production: 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well: Leo Massey
Producing formation: Depth to top: Bottom: Total Depth of Well 3406' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3403'	2339.42'
				8 5/8"	198'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Made bottom hole plug back with sand to 3100'. Mixed and ran 5 sacks cement thru dump bailer.
Squeezed hole with 5 sacks hulls - 25 sacks gel - 70 sacks cement and 10 sacks gel.
Released plug and displaced with 55 sacks cement.

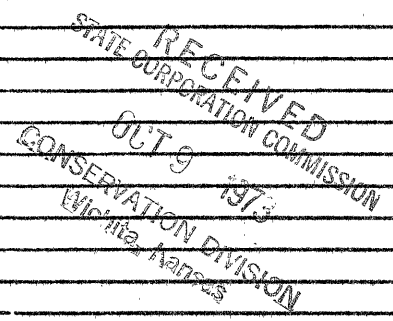

Name of Plugging Contractor: Southwest Casing Pulling Co. (if additional description is necessary, use BACK of this sheet)
Address: Box 364 Great Bend, Kansas 16-9-73

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Dec.
Box 364 Great Bend, Kansas (Address)



Subscribed and sworn to before me this 6 day of October, 1973.
Notary Public.