

15-147-00457-00-00

Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Phillips County, Sec. 3 Twp. 5 Rge. 20 (E) (W) x

Location as "NE/CNW/SW" or footage from lines SE SE SE

Lease Owner Bankoff Oil Co.

Lease Name Perry Well No. #2

Office Address P.O. Drawer 2479 Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 7-29-70 19

Application for plugging approved 19


Plugging commenced 8-13-70 19

Plugging completed 8-17-70 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

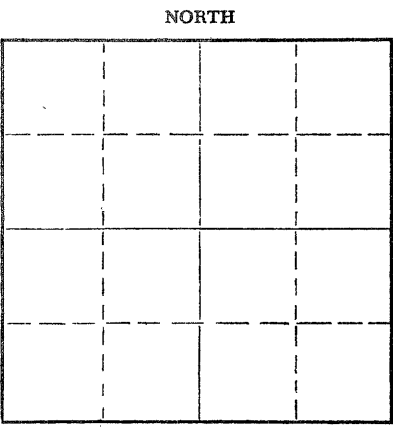

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3415' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3411'	2420.44'
				10 3/4"	191'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3150'. Mixed and ran 5 sacks cement thru dump bailer.
Squeezed hole with 5 sacks hulls, followed with 12 sacks gel, followed with 130 sacks cement. Cement from 775' - 475', followed with 9 sacks gel. Gel from 475' to 200', followed with 35 sacks cement. Cement from 220' to 130', followed with 10 sacks gel. Gel from 130' to 30'. Displaced with 10 sacks cement. Cement from 30' to 0'.

RECEIVED
STATE CORPORATION COMMISSION
AUG 24 1970
CONSERVATION DIVISION
Wichita, Kansas

8-24-70

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.

Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec
Box 364, Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 19 day of August, 19 70

October 1972
My commission expires
Sidney J Miller
Notary Public.

