

RECEIVED

NOV 19 2004

KCC WICHITA

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 159-01982-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date _____

Well Operator: American Warrior Inc. KCC License #: 4058 11/04

Address: P.O. Box 399 (Owner/Company Name) City: Garden City (Operator's)

State: Ks. Zip Code: 67846 Contact Phone: (620) 272 - 1023

Lease: Volkland Well #: #2 Sec. 32 Twp. 18 S. R. 9 East West

C - NW - SE - SW Spot Location / QQQQ County: Rice

990 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

3630 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 85/8 Set at: 313' Cemented with: NA Sacks

Production Casing Size: 51/2 Set at: 3233' Cemented with: NA Sacks

List (ALL) Perforations and Bridgeplug Sets: 3233' to 3241' OH.

Elevation: 1721 (G.L. / K.B.) T.D.: 3241 P.B.T.D.: 3241OH Anhydrite Depth: NA
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Pump 10sx plug to top of Arbuckle, Perf 1100' and pump 35sx plug, Perf 900' Pump 35sx plug and perf 356' Cir to surface. Cut casing off 6' below surface and back fill.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No Dave Wertz 11/18/04

If not explain why? None on file.

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Jody Smith

Phone: (620) 272 - 1023

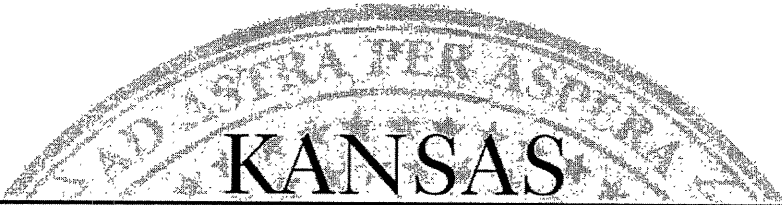
Address: P.O. Box 399 City / State: Garden City Ks. 67846

Plugging Contractor: Swift Services Inc. KCC License #: 32382 10/05

Address: P.O. Box 466 (Company Name) Phone: (785) 798 - 2300 (Contractor's)

Proposed Date and Hour of Plugging (if known?): NA

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent
Date: 11/18/04 Authorized Operator / Agent: [Signature] (Signature)

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

American Warrior, Inc.
PO Box 399
Garden City, KS 67846

November 20, 2004

Re: VOLKLAND #2
API 15-159-01982-00-00
NWSESW 32-18S-9W, 990 FSL 3630 FEL
RICE COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #2
3450 N. Rock Road, Suite 601
Wichita, KS 67226
(316) 630-4000

Sincerely

David P. Williams
Production Supervisor